


REVISIONS			
REV.	DATE	DESCRIPTION	BY
1	8/21/2018	3-8016 REDRAWN IN 3D	MBG



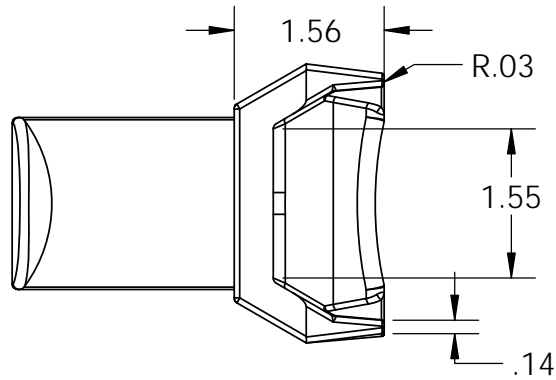


NOTE:

- 1.0 MATERIAL - DUCTILE IRON PER ASTM A-536, GRADE 654512, BHN 156-217, MATERIAL CERTIFICATION REQUIRED PER EACH SHIPMENT.
- 2.0 SHRINK - 0.125"/FT. (MASTER PATTERN).
- 3.0 DRAFT - 5° UNLESS NOTED.
- 4.0 RADII - 0.063" UNLESS NOTED.
- 5.0 MARKING - RAISED 1/4" LETTERS AS MARKED.
- 6.0 TOLERANCE - ISO 8062 CT-9.
- 7.0 CASTING MUST BE FREE OF BURS, SEAMS, FLASHES, WELDS, HOLES AND SHARP EDGES.
- 8.0 FINISH - HOT DIP GALVANIZE PER ASTM A-153.
- 9.0 PART NO. - P338 (P63743C).
10. CORE TO BE USED FOR THE HOOK SECTION.
11. DIMENSIONS IN INCHES.

B

B

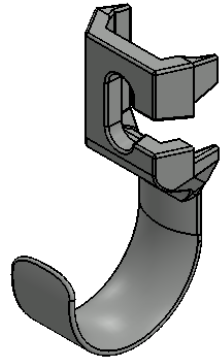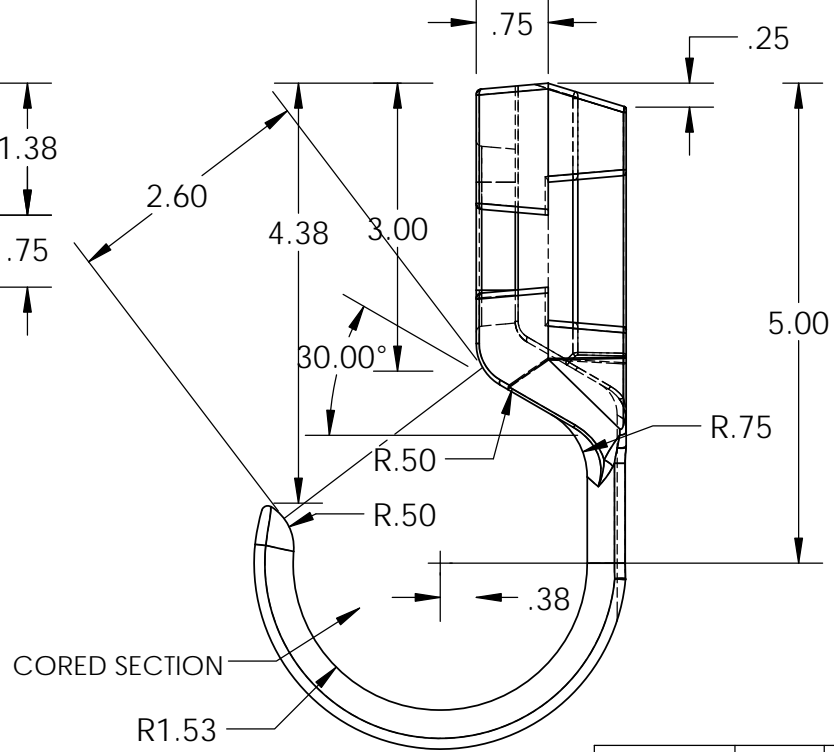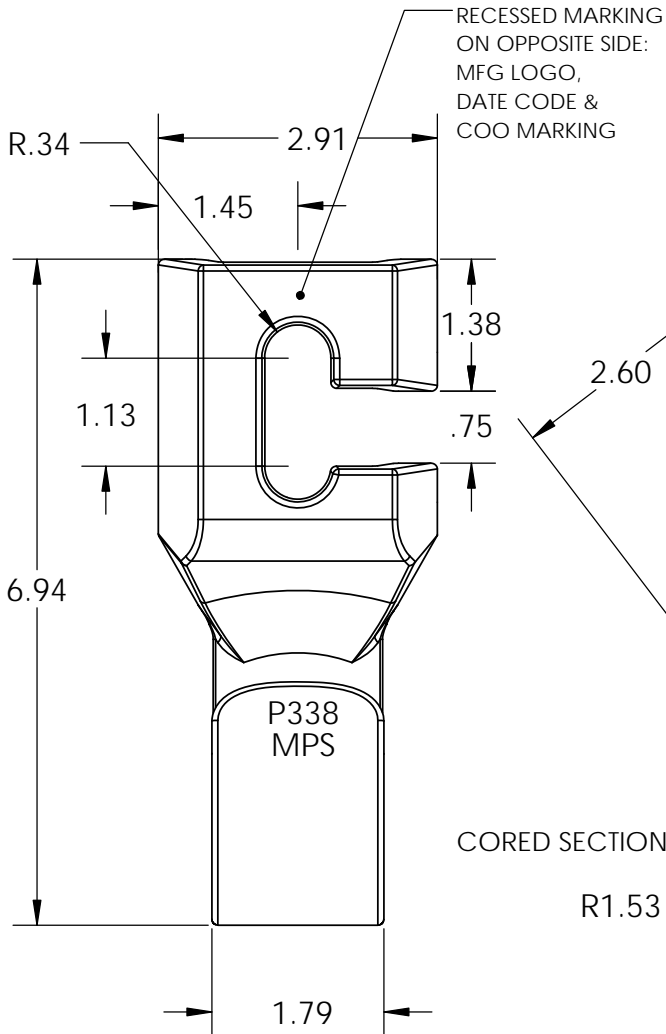

A

A

MACLEAN POWER SYSTEMS

P338
IRON PLACING HOOK

	NAME	DATE
DRAWN	GAD	05/05/65
CHECKED		

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MACLEAN POWER SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MACLEAN POWER SYSTEMS IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

SIZE	DWG. NO.	REV
A	3-8016C	1
SCALE: 1:2		WEIGHT: 2.3 LBS
SHEET 1 OF 1		

2

1