


25KV INTERFACE

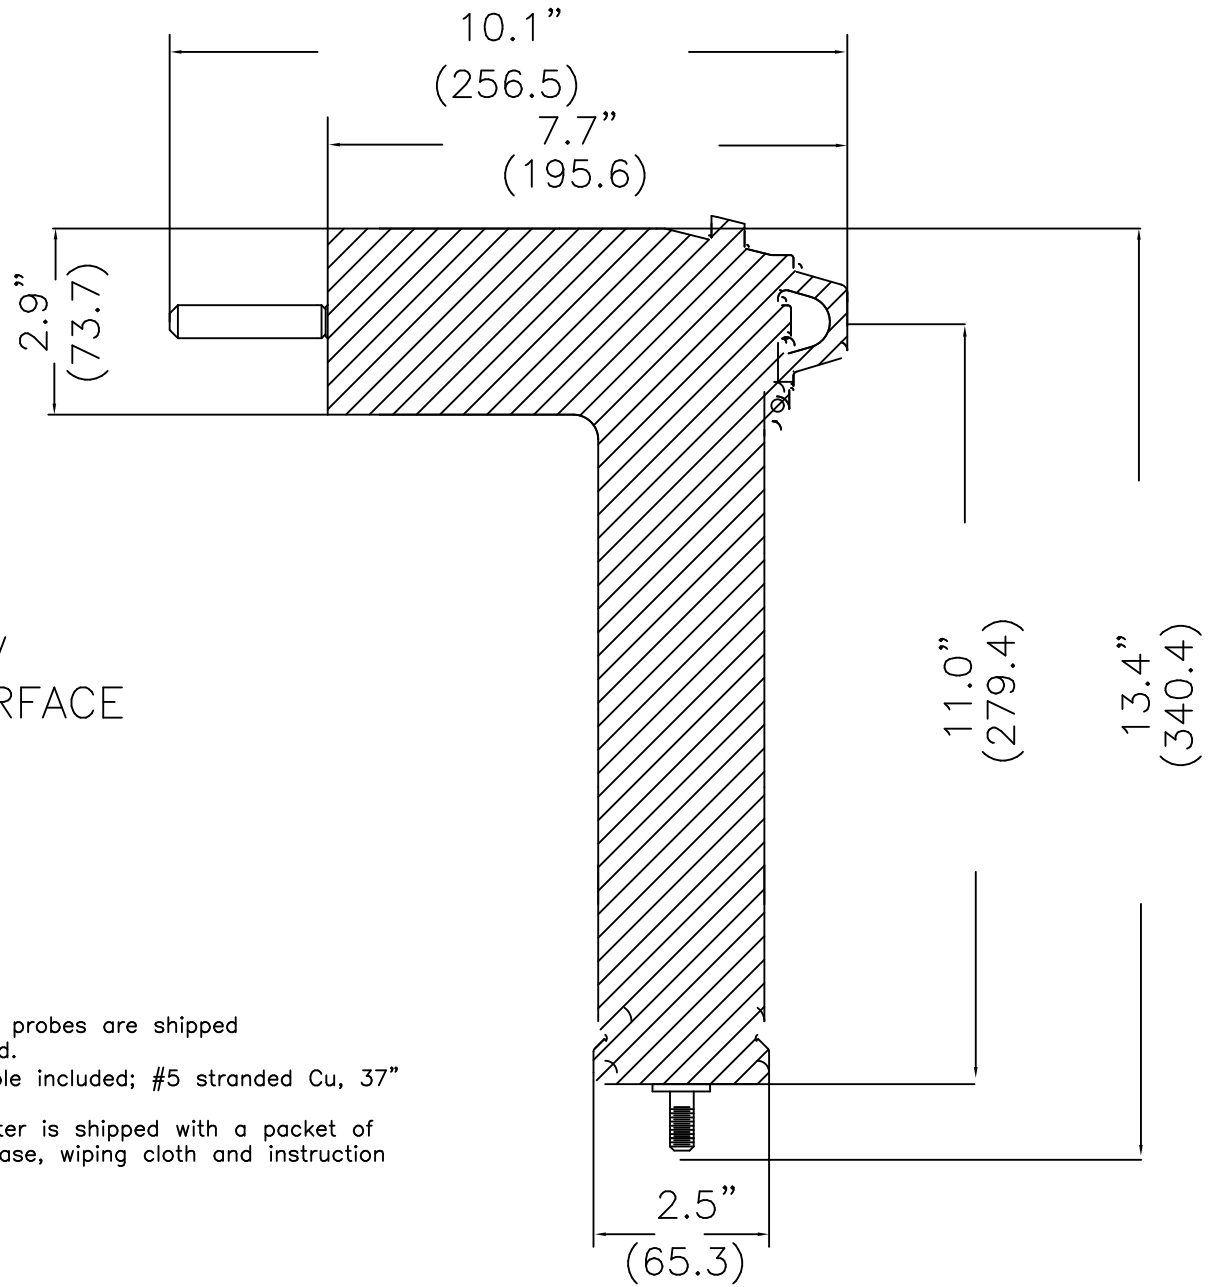

1. Load break probes are shipped unassembled.
2. Ground cable included; #5 stranded Cu, 37" long.
3. Each arrester is shipped with a packet of silicone grease, wiping cloth and instruction sheet.

ELECTRICAL AND PHYSICAL CHARACTERISTICS

RATING kV-RMS	MCOV kV-RMS	WEIGHT LBS./(kg)	F.O.W. kV-CREST	MAX SWITCH. kV-CREST	MAX DISCHARGE VOLTAGE (kV-CREST)					
					1.5 kA	3 kA	5 kA	10 kA	20 kA	40 kA
27	22.0	6.4/(2.9)	93.5	69.1	76.5	83.4	88.2	96.6	110.7	128.3



MACLEAN POWER SYSTEMS

www.maclepower.com

GAPLESS METAL OXIDE
ZE ELBOW DISTRIBUTION ARRESTER
27 KV RATED
22 KV MCOV