

SWITCH RATINGS


VOLTAGE CLASS: 25kV
 B.I.L. RATING: 150kV
 CONTINUOUS CURRENT: 900A-RMS (IEEE C37.30)

MOMENTARY CURRENT: 40,000 AMP, 10 CYCLES
 25,000 AMP, 3 SECONDS
 SWITCH LIFTING WEIGHT: 645 POUNDS

REV. #	EC#	REVISION DESCRIPTION	DATE	BY
01	10484	REVISE SWITCH RATINGS	02/10/26	TK
00	10458	INITIAL RELEASE	01/23/26	TK

REVISIONS

THIS IS A PROPRIETARY AND CONFIDENTIAL DOCUMENT OF INERTIA ENGINEERING AND MACHINE WORKS INC., STOCKTON CA. THIS DOCUMENT CANNOT BE COPIED IN WHOLE OR IN PART WITHOUT THE EXPRESS PERMISSION OF INERTIA ENGINEERING. THE DOCUMENT IS PROTECTED BY US FEDERAL COPYRIGHT LAW.

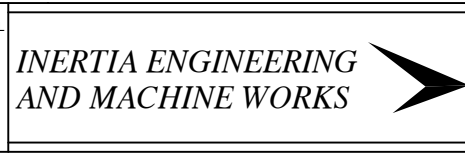

SWITCH DESCRIPTION

SWITCH #: RB29SXFRK60
 DESCRIPTION:
 3-PHASE RECLOSER / REGULATOR
 BYPASS DISCONNECT SWITCH, 25kV,
 900A, 150kV B.I.L. RATING, 129 IN.
 FIBERGLASS XARM, SPECIAL SPACING

CONSTRUCTION DRAWING	
DATE: 01/23/2026	SCALE: NTS
DRAWN BY: TK	
DRAWING NO.	REVISION NO.
9760-9	01