

## Braced Post Insulator Assembly B2911053T12072MX

1) H2 91 10 043 MX SS 022	[1]
2) S1 40 80 042 MX AL 027	[1]
3) Socket/Y-Clevis (SYC-56)	[1]
4) Turnbuckle (G-227-NBC-3/4x12C)	[1]
5) Shackle (ASH-55-BC)	[1]

### ASSEMBLY DIMENSIONAL VALUES

Post Section Length (PSL)	54.0 in	1,372 mm
Suspension Section Length (SSL)	54.0 in	1,372 mm
Height of Assembly (H)	72.0 in	1,829 mm
Length of Brace (B)	87.8 in	2,230 mm
Upper Pole Connection Offset (A)*	2.0 in	51 mm
Angle Between Insulators (C)		53 Degrees
Dry Arc Distance	43.6 in	1,107 mm
Leakage Distance	116.7 in	2,964 mm

\*This connection bracket to be supplied by customer

### ASSEMBLY ELECTRICAL VALUES\*


60 Hz Dry F.O. (Min. Withstand)	416 kV	(391) kV
60 Hz Wet F.O. (Min. Withstand)	386 kV	(303) kV
CIFO+ (Min. Withstand)	719 kV	(641) kV
CIFO- (Min. Withstand)	791 kV	(680) kV

\*Values shown are based on minimum electricals for the assembly

### ASSEMBLY MECHANICAL VALUES

Maximum Working Vertical Load	10,072 lbs	44.8 kN
-------------------------------	------------	---------

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

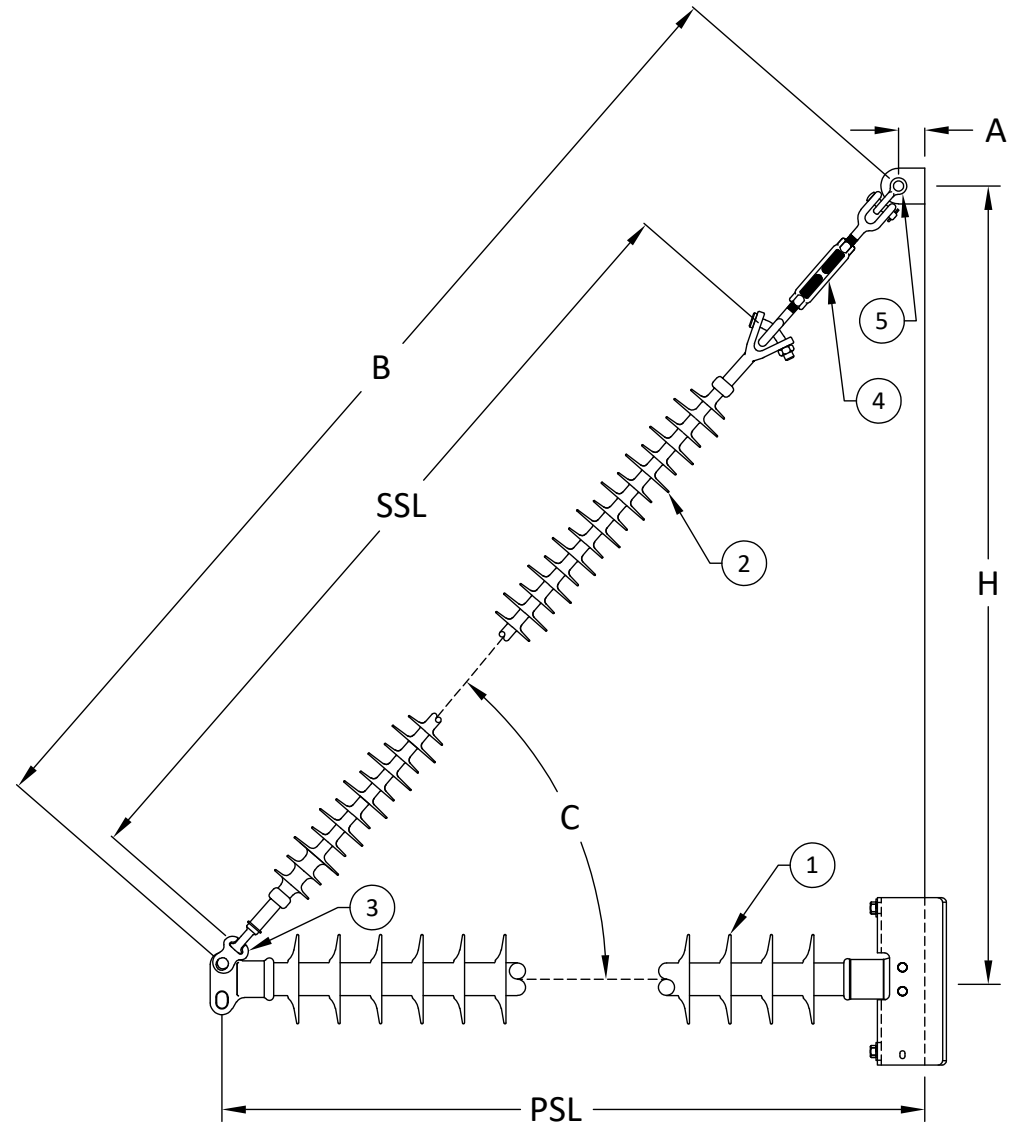

MPS Catalog Number

**H2 91 10 043 MX SS 022**

Date: 04/13/2022

## End Fittings

Tower End Fitting:

Gain / 0 deg / Steel

Line End Fitting:

2 HL Drop Tongue / Galv. Ductile Iron

## Material

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Mounting Angle:

0 deg

Number of Sheds:

22

Rod Diameter:

2.5 in

Weight Estimate:

58 lbs

26 kg

## Dimensional Values

Section Length (L):

54 in 1,372 mm

Rubber Length (X):

43 in 1,092 mm

Shed spacing (S):

1.95 in 50 mm

Shed Projection (P):

1.86 in 47 mm

Dry Arc Distance:

45.1 in 1,145 mm

Leakage Distance:

116.7 in 2,965 mm

## Electricals Values

60 Hz dry Flashover (Min. Withstand):

429 kV 403 kV

60 Hz Wet Flashover (Min. Withstand):

398 kV 313 kV

CIFO Positive (Min. Withstand):

742 kV 662 kV

CIFO Negative (Min. Withstand):

809 kV 701 kV

## Mechanical Values

Max. Design Cant. Load (MDCL):

1,706 lbs 7.6 kN

Specified Cant. Load (SCL):



3,412 lbs 15.2 kN

Specified Tensile Load (STL):

15,000 lbs 66.7 kN

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

Notes:

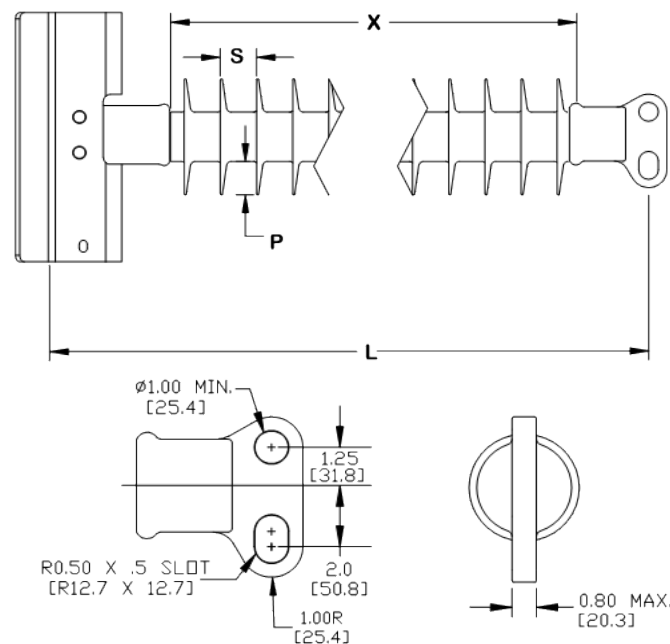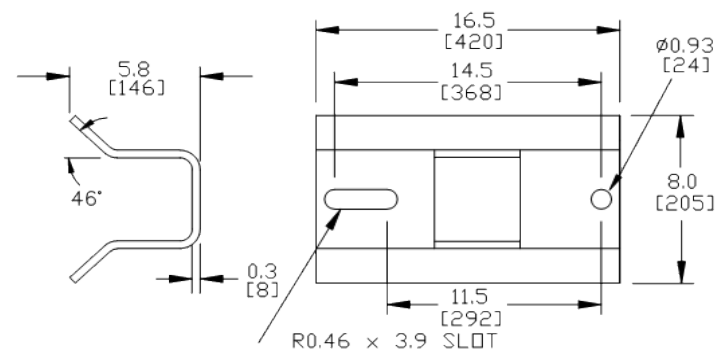


Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Prepared By: Stephen Lucci



Date: 03/24/2022

### Y-Clevis / Forged Steel

Ball / Forged Steel  
/ (ANSI 52-5)

## None

Corona Rings are recommended for applications of 230 kV and above

13 large

14 standard

16 mm

9.9 lbs

5 kg

54 in

1,372 mm

42 in

1,067 mm

1.5 in

38 mm

2 in

51 mm

—

1.5

3 in

76 mm

44.8 in

1,138 mm

121.8 in

3,094 mm

441 kV

408 kV

395 kV

344 kV

757 kV

656 kV

803 kV

704 kV


25,000 lbs

111.2 kN

12,500 lbs

55.6 kN

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

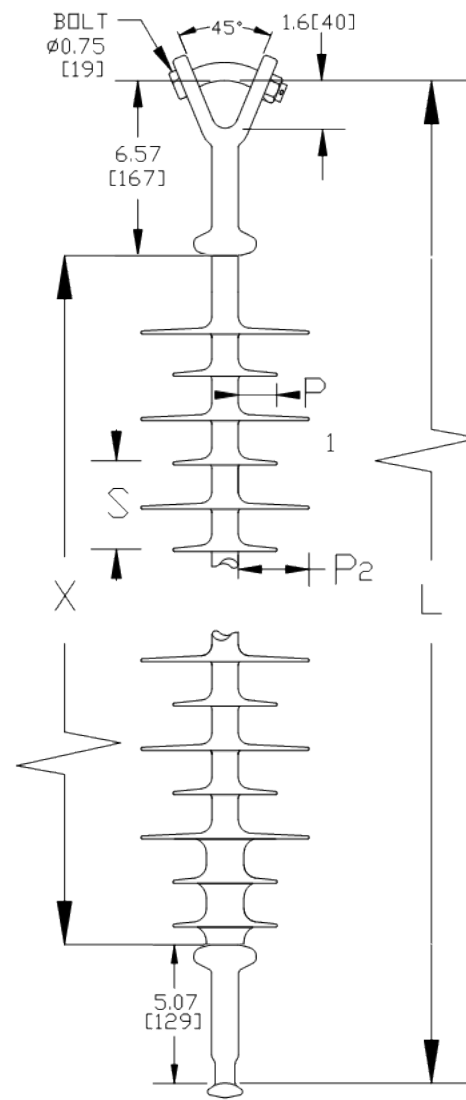

Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Prepared By: Stephen Lucci



MacLean Power Systems

## B2911053T12072MX Ultimate Combined Load Curve

Factor of Safety = 1

— 0 LBS Longitudinal	- - - 300 LBS Longitudinal
- - - 600 LBS Longitudinal	— 900 LBS Longitudinal

**Assumptions:**

- Loading sequence is Longitudinal, Vertical, Transverse
- Factor of Safety applied to entire system
- Negligible downward tip deflection
- Static moduli values
- Confidence level of 95%

