
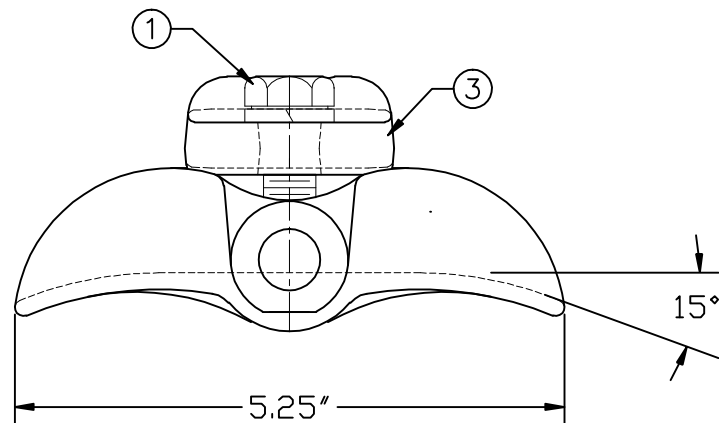


REVISIONS				
NO.	DATE	DESCRIPTION	BY	CKD

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY			
				A	B	C	D
1	P56045	H-0241-01	1/2" SEMSBOLT	2	2	2	
2	P64651C	>LPS-86F-BC	LPS-86F BODY GALVANIZED	1	1	1	
3	P64652	>LPS-86F-K	LPS-86F KEEPER	1	1	1	
4	P60279	H-0480-02	CONICAL COMPRESSION SPRING	-	1	2	

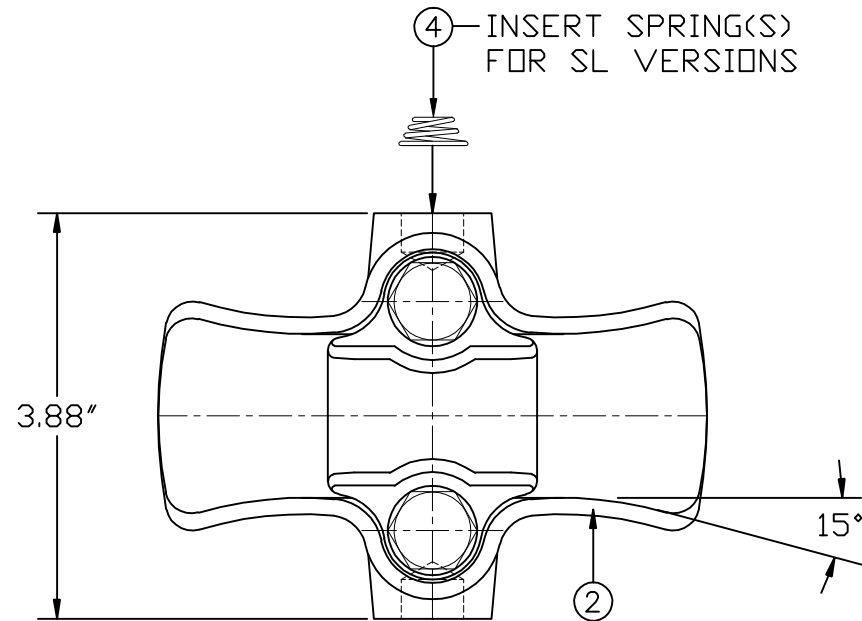

ASSEMBLY NUMBER	REF. NO.
FCTS-084	A
FCTS-084-SL1	B
FCTS-084-SL-2	C
	D

NOTES:

- MATERIAL - BODY AND KEEPER:
DUCTILE IRON, HOT DIP GALVANIZED PER ASTM-A153

HARDWARE:
STEEL, HOT DIP GALVANIZED PER ASTM-A153

SPRING:
STAINLESS STEEL
- ULTIMATE STRENGTH: 5,000 LBS.
- CLAMPING RANGE - 0.35" TO 0.86"



TOP LINE POST INSULATOR ANGLE CLAMP
FCTS-084, FCTS-084-SL1, FCTS-084-SL-2

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

ENG. REF.

DATE: 12/27/2011	SCALE: NONE	NO. BC8590-1	R / 0	SH. 1 / OF 1
DWN. BY: CDR	CKD. BY:	APR. BY:		