
REVISIONS


NO.	DATE	DESCRIPTION	BY	CKD
1	6/19/23	CHANGED TO NEW DESIGN, ½"HDWR	KMK	
2	10/3/23	UPDATE BODY P# IN BOM	KMK	
3	6/25/25	CHANGED CLEVIS PIN TO ⅛" LONGER	BHB	
4	1/23/26	ADDED NOTE FOR SLIP STRENGTH	CRH	
5	11/17/26	ADDED LOCK WASHER TO ASSEMBLY	LA	

ASSEMBLY NUMBER	REF. NO.
DA-15-N	A
DA-15-S	B
DA-15-C	C
DA-15-N-LW	D

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY			
				A	B	C	D
1	P56093	H-0315-02	5/8"ø x 1-7/8" CLEVIS PIN	1	1	1	1
2	P56138	H-0400-04-W	1/2" HEX NUT FIN	4	4	4	4
3	P56294	H-0500-04	1/2" FLAT WASHER	4	4	4	4
4	P61134	M-111-3	LONG COTTER PIN	1	1	1	1
5	P55997	H-0201-04	1/2" U-BOLT	2	2	2	2
6	P83483	P-6704-01	DA-15 BODY CASTING	1	1	1	1
7	P83484	P-6705-01	DA-15 KEEPER	1	1	1	1
8	P56893P	SI-625	SOCKET EYE		1		
9	P327214	SCE-55-625	CLEVIS EYE			1	
10	P56399	H-520-4	1/2" LOCK WASHER				4

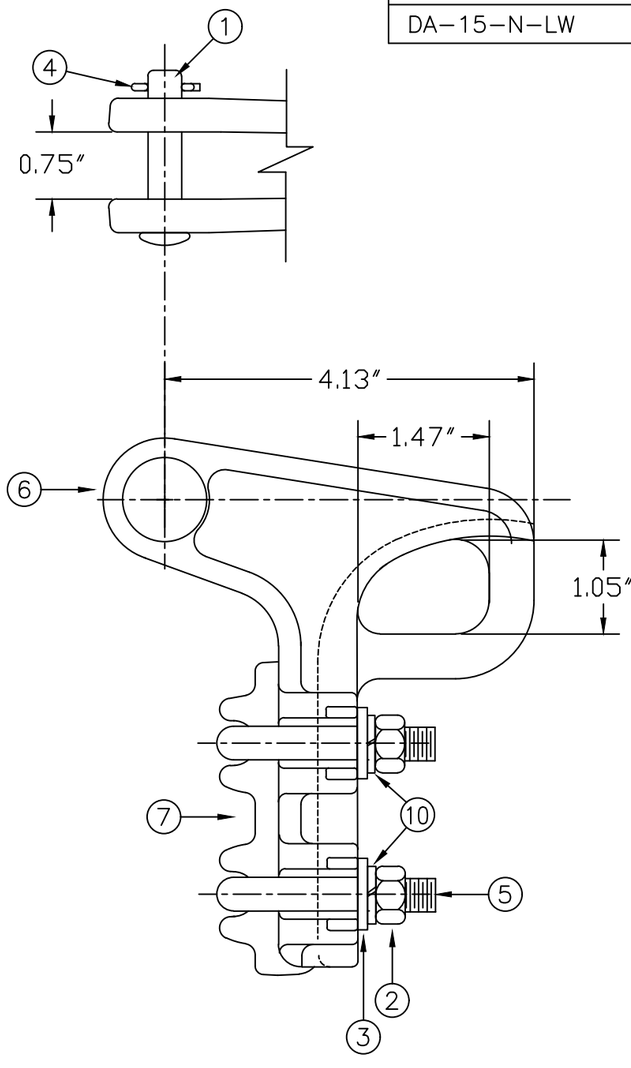

ASSEMBLE SOCKET EYE TO CLAMP BODY FOR DA15-S

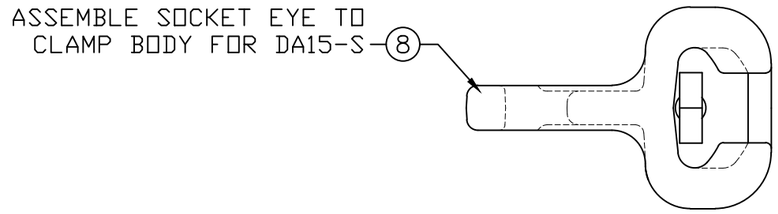

ASSEMBLE CLEVIS EYE TO CLAMP BODY FOR DA15-C

NOTES:

1. MATERIAL – BODY & KEEPER:
   ALUMINUM ALLOY A356-T6

   HARDWARE:
   STEEL, HOT DIP GALVANIZED PER ASTM-A153

   COTTER PIN:
   STAINLESS STEEL

2. ULTIMATE STRENGTH: 8,000 LBS.
3. CLAMPING RANGE – 0.16" TO 0.522"
4. MINIMUM SLIP STRENGTH OF THIS CLAMP SERIES IS 60% OF THE CONDUCTOR RATED STRENGTH (NORMAL STRENGTH)

ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in instillation, maintenance, and operation of products supplied by Maclean Power Systems.

MACLEAN POWER SYSTEMS

QUADRANT DISTRIBUTION STRAIN CLAMP

DA-15-N

DATE: 01/04/2012	SCALE: NONE	NO.		SH. 1
DWN. BY: CDR	CKD. BY:	APR. BY:	BC8618-1	R/5 OF 1