

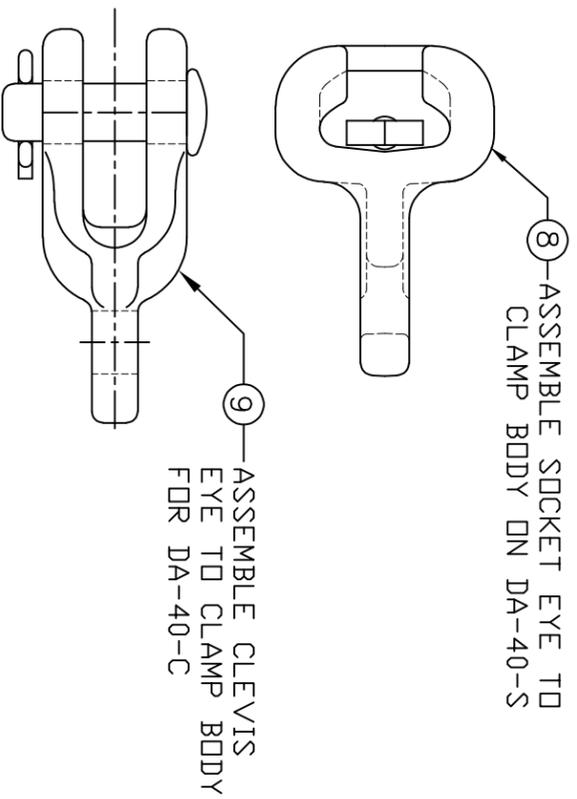


REVISIONS			
NO.	DATE	DESCRIPTION	BY CKD
1	9/07/22	UPDATED TO NEW CASTING DESIGN	KMK

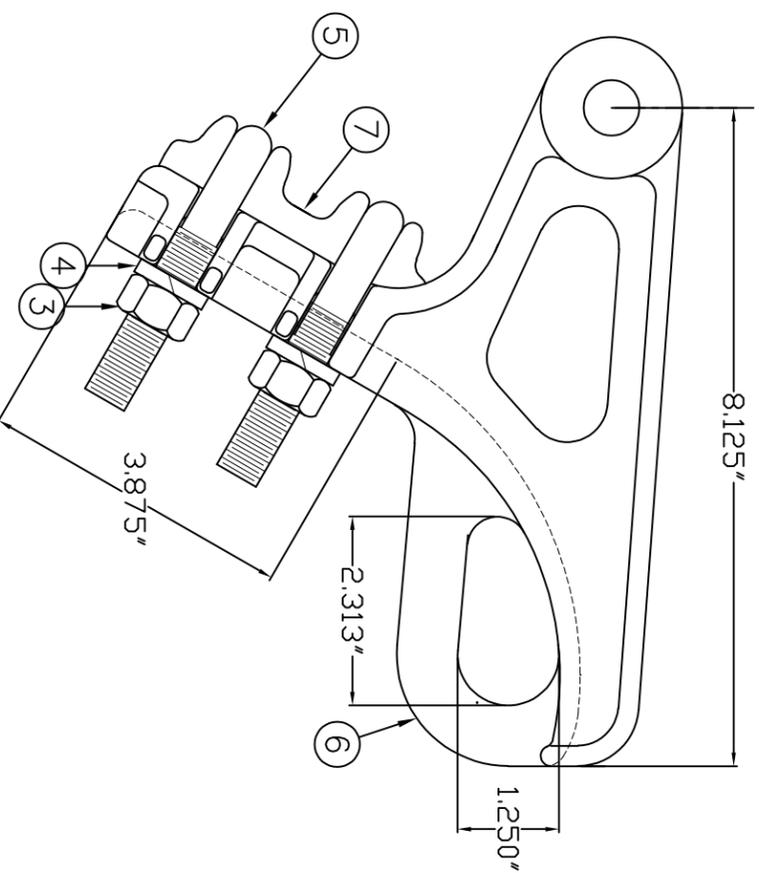

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY			
				A	B	C	D
1	P56058	H-0300-03	5/8" ϕ CLEVIS PIN	1	1	1	
2	P56109	H-0360-01	COTTER PN HMP 5/8	1	1	1	
3	P56138	H-0400-04-W	1/2"-13 HEX NUT FIN	4	4	4	
4	P56399	H-0520-04	1/2" LOCKWASHER	4	4	4	
5	P56018	H-0201-22	1/2" U-BOLT	2	2	2	
6	P83577	P-6717-01	DA40 CLAMP BODY	1	1	1	
7	P83466	P-6690-01	ADE-23/ DA-40 KEEPER	1	1	1	
8	P56895P	SI-1125	SOCKET EYE	-	-	1	
9	F410590	CE-55-9	CLEVIS EYE	-	1	-	

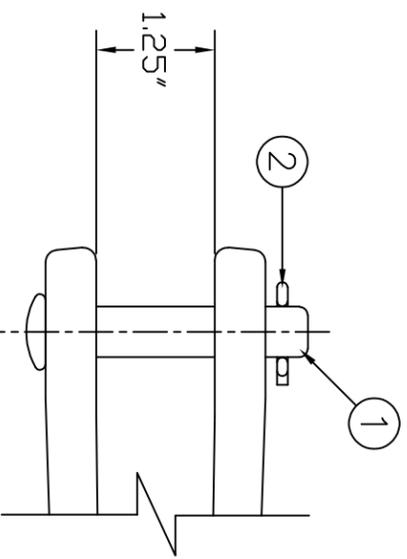

ASSEMBLY NUMBER	REF. NO.
DA-40-N	A
DA-40-C	B
DA-40-S	C
	D

NOTES:

1. MATERIAL – BODY & KEEPER: ALUMINUM ALLOY A356-T6
HARDWARE: STEEL, HOT DIP GALVANIZED PER ASTM-A153
2. ULTIMATE STRENGTH: 20,000 LBS.
3. CLAMPING RANGE – 0.44" TO 1.065"



QUADRANT DISTRIBUTION STRAIN CLAMP
DA-40-N

ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

DATE: 01/04/2012	SCALE: NONE	NO.	R	SH
DMN: CDR	CKD: RY	BC8625-1	1	1