
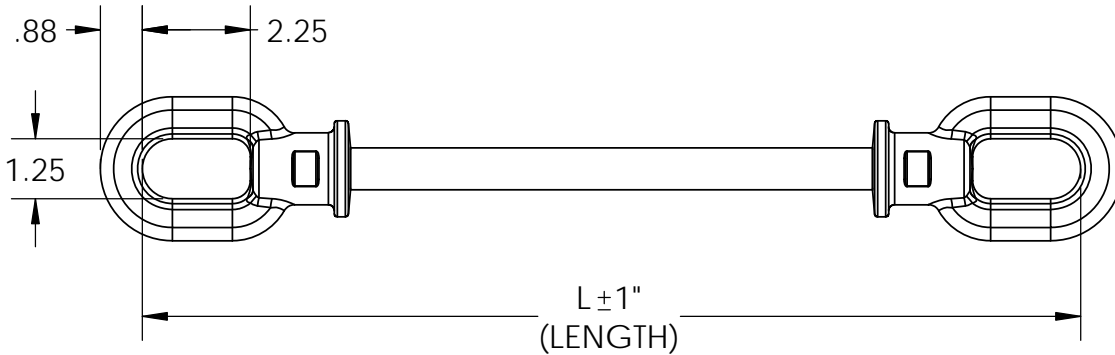
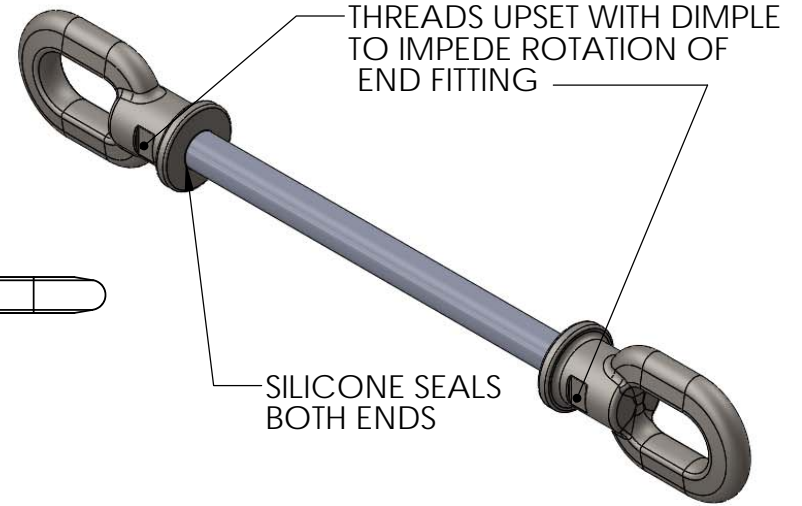


2

1

B

B

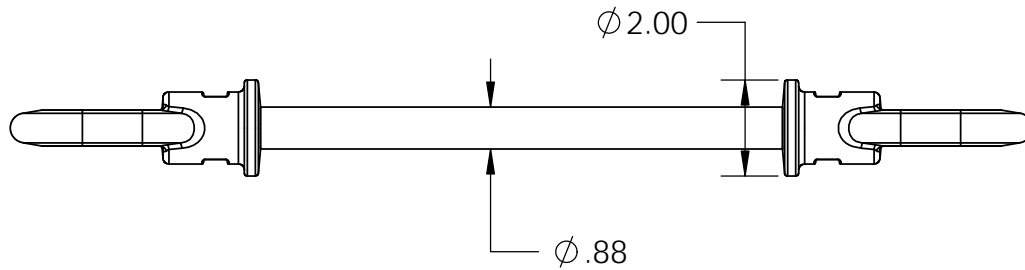

NOTE:

1. MATERIAL
 -END FITTING - FORGED STEEL.
 - ϕ 7/8" ROD - GRADE 5 STEEL.
2. FINISH - HOT DIP GALVANIZE PER ASTM A-153.
3. ULTIMATE STRENGTH - 50,000 LBS.
4. "-CH1" SUFFIX MUST MEET CHARPY LEVEL 1, 15 FT. LBS. @ -4 DEG. F
5. CERTIFICATION TO BET SUPPLIED BY VENDOR, 3 TESTS PER HEAT CODE

A

A

MACLEAN POWER SYSTEMS

OVAL EYE - OVAL EYE H.L. EXT.
CAT. NO. LOO-50-L

	NAME	DATE
DRAWN	MBG	09/18/17
CHECKED		

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MACLEAN POWER SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MACLEAN POWER SYSTEMS IS PROHIBITED.

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL \pm
 ANGULAR: MACH \pm BEND \pm
 TWO PLACE DECIMAL \pm
 THREE PLACE DECIMAL \pm

SIZE	DWG. NO.	REV
A	BC8887-1	0
SCALE: 1:4	WEIGHT:	SHEET 1 OF 1

2

1