


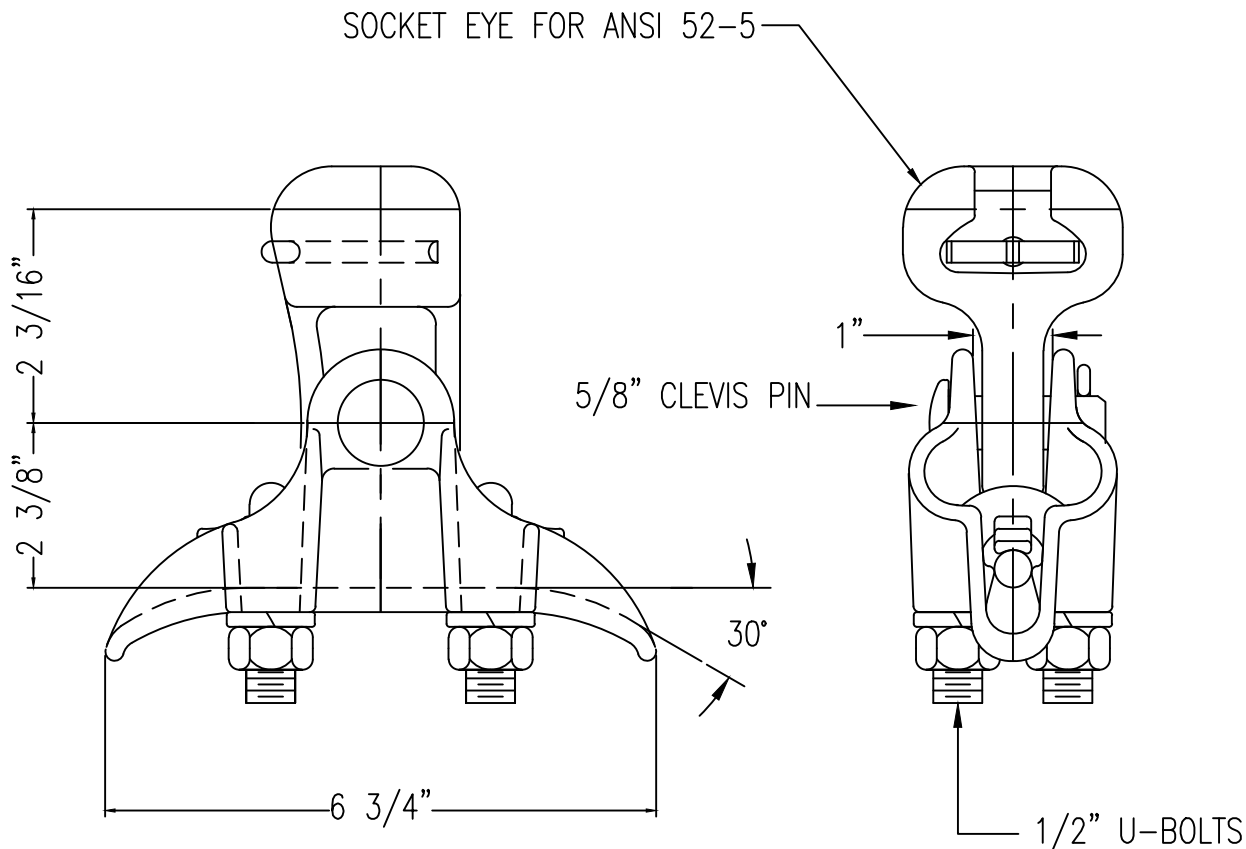

NOTES:

1. MATERIAL:

CLAMP BODY: DUCTILE IRON, HOT DIP GALVANIZED

SOCKET EYE: DUCTILE IRON, HOT DIP GALVANIZED

HARDWARE: STEEL, HOT DIP GALVANIZED PER ASTM-A153

COTTER PIN: STAINLESS STEEL

2. ULTIMATE STRENGTH - 18,000 LBS.

3. RECOMMENDED TORQUE ON U- BOLTS, 40-45 FT./ LBS.

4. CLAMPING RANGE: .30"-.83"

1	5/4/22	RANGE WAS .40" - .83"	BKS
NO.	DATE	DESCRIPTION	BY CKD

REVISIONS



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

FERROUS SUSPENSION CLAMP
CAT. NO. FSC-83-S

DATE: 1/18/22	SCALE: NONE	NO. CEA-2211-7	R/1	SH.1 OF 1
BY: KK	BY: WCL	BY: WCL		