
NO. CEA-2211

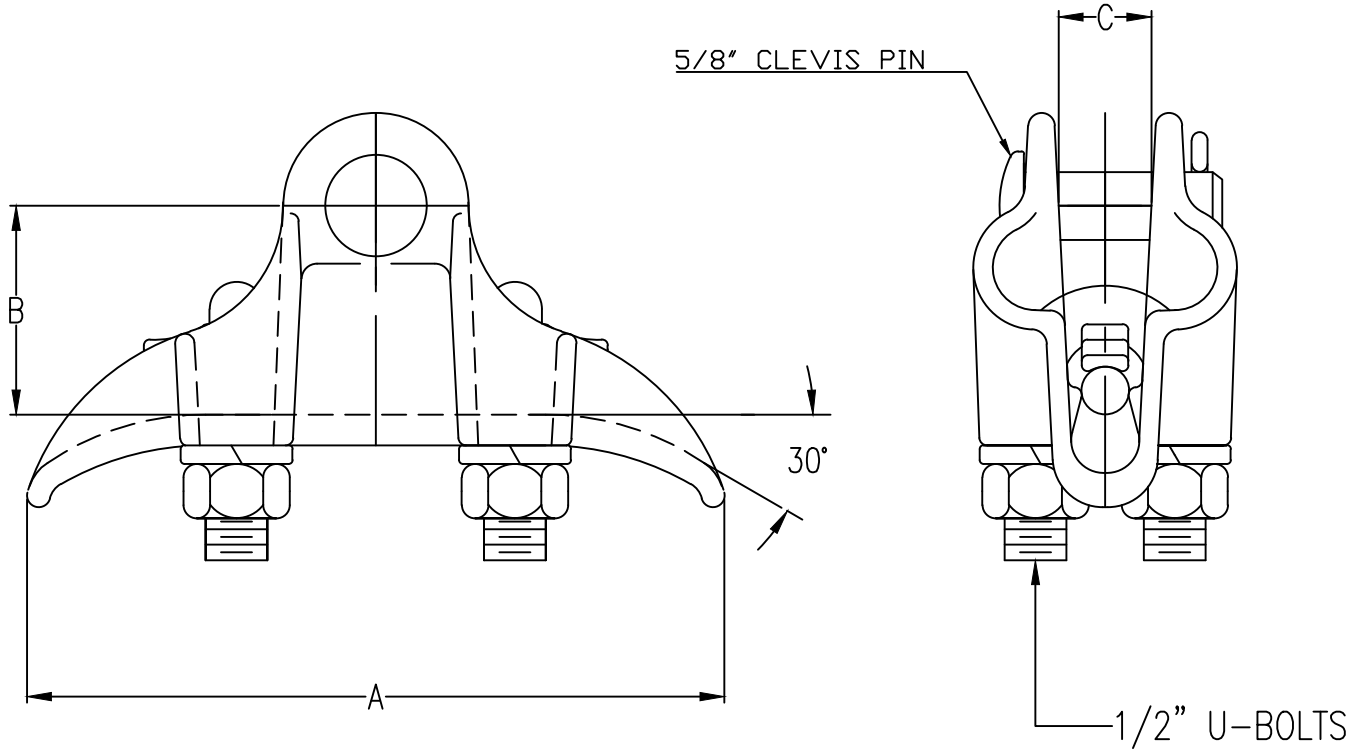

CATALOG NUMBER	CLAMPING RANGE (IN.)	ULTIMATE STRENGTH	DIMENSIONS IN INCHES		
			A	B	C
FSC-46	.16-.46	16,000	5 5/8	2	11/16
FSC-60	.20-.60	17,000	6 3/8	2	7/8
FSC-83	.30-.83	18,000	6 3/4	2 3/8	1

NOTES:

1. BODY & KEEPER : DUCTILE IRON, GRADE 604512, HOT DIP GALVANIZED
2. CLEVIS PIN : STEEL HOT DIP GALVANIZED
3. U-BOLTS & HARDWARE : STEEL GALVANIZED
4. COTTER PIN : STAINLESS STEEL
5. FOR BOLT, NUT AND COTTER , ADDS SUFFIX "-BNK" TO

NO.	DATE	DESCRIPTION	BY	CKD
5	4/28/26	REDRAWN INTO CAD WITH ACTIVE PARTS	DP	
4	7/23/25	REMOVED GRADE 5	HMG	
3	5/25/88	ADD FSC-119	AG	
2	2/10/88	ADD FSC-105-N	LM	
1	4/16/86	REDRAWN WAS CEB-1260	JSG	

REVISIONS

MACLEAN POWER SYSTEMS

FERROUS SUSPENSION CLAMP

DATE: 4/16/86	SCALE: NONE	NO. CEA-2211	R/5	SH.1 OF 1
DWN. BY: JSG	CKD. BY:	APR. BY:		