




Guy Strain Insulators

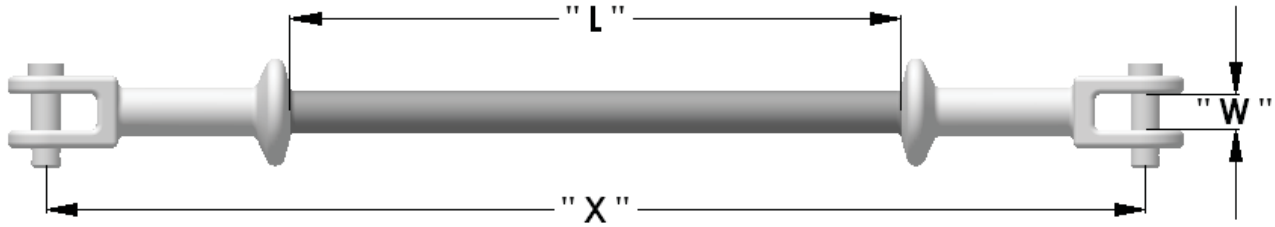

GCC50 Series

	Catalog Number	Rod Length "L"	Connection "X"	Clevis Opening "W"
		inch	inch	inch
Min. Ultimate Strength Rating: 50,000 lbs.	GCC50-18-SC	18	32	15/16"
	GCC50-24-SC	24	38	15/16"
	GCC50-36-SC	36	50	15/16"
	GCC50-42-SC	42	56	15/16"
	GCC50-54-SC	54	68	15/16"
	GCC50-60-SC	60	74	15/16"
	GCC50-78-SC	78	92	15/16"
	GCC50-90-SC	90	104	15/16"
	GCC50-96-SC	96	110	15/16"
	GCC50-120-SC	120	134	15/16"
	GCC50-144-SC	144	158	15/16"

Notes:

- 1) Minimum Ultimate Strength Rating - 50,000 lbs
- 2) Rod coated in Silicone Rubber
- 3) Cotter Pin Diameter - 3/4"

GCC80 Series

	Catalog Number	Rod Length "L"	Connection "X"	Clevis Opening "W"
		inch	inch	inch
Min. Ultimate Strength Rating: 80,000 lbs.	GCC80-18-SC	18	37	1 1/16"
	GCC80-24-SC	24	43	1 1/16"
	GCC80-36-SC	36	55	1 1/16"
	GCC80-42-SC	42	61	1 1/16"
	GCC80-54-SC	54	73	1 1/16"
	GCC80-60-SC	60	79	1 1/16"
	GCC80-78-SC	78	97	1 1/16"
	GCC80-90-SC	90	109	1 1/16"
	GCC80-96-SC	96	115	1 1/16"
	GCC80-120-SC	120	139	1 1/16"
	GCC80-144-SC	144	163	1 1/16"

Notes:

- 1) Minimum Ultimate Strength Rating - 80,000 lbs
- 2) Rod coated in Silicone Rubber
- 3) Cotter Pin Diameter - 1"