


Bolt (5/8" and 3/4" diameter), Machine, Square Head (Crossarm bolt, through bolt)

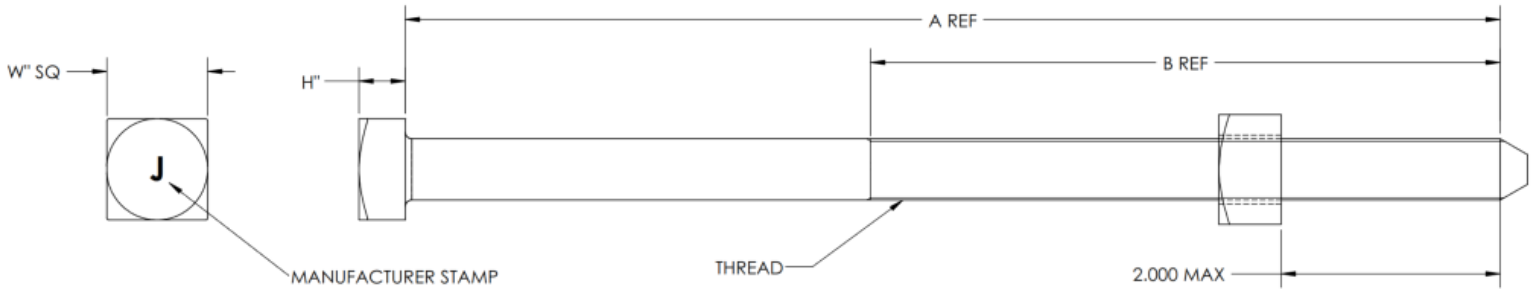

SIZE	CATALOG #	THREAD	A"	B"	W"	H"
5/8"	J8810	5/8"-11	10	6	15/16	7/16
	J8812	5/8"-11	12	6	15/16	7/16
	J8814	5/8"-11	14	6	15/16	7/16
	J8816	5/8"-11	16	6	15/16	7/16
SIZE	CATALOG #	THREAD	A"	B"	W"	H"
3/4"	J8910	3/4"-10	10	6	1-1/8	1/2
	J8912	3/4"-10	12	6	1-1/8	1/2
	J8914	3/4"-10	14	6	1-1/8	1/2
	J8916	3/4"-10	16	6	1-1/8	1/2

Features:

- Material: Hot Rolled Carbon Steel, 60 KSI Minimum
- Finish: Hot Dip Galvanized per ASTM A153
- Minimum Tensile Strengths:
 - 5/8" Diameter = 13,550 lbs
 - 3/4" Diameter = 20,500 lbs
- Rolled Threads
- Cone Point
- Assembled Square Nut
- Other Lengths Available (see macleanpower.com)

Conformance to Standards:

- ANSI / IEEE C135.80
- ANSI / IEEE C135.1
- ANSI / ASME B18.2.1
- ASTM A307
- CSA C83.23

RUS Listed: Section "c – Bolt, machine"