




Temporary Underground Elbow Assemblies

Temporary Underground Elbow Assemblies

Features

- Each custom grounding elbow assembly is supplied with 6 feet of cable

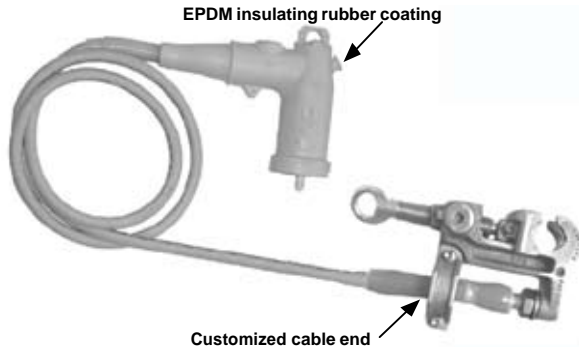


Z15	B	2/0	Y	6
Voltage		Cable Size		Cable Length
Z15	= 15kV Elbow	1/0	= 1/0 AWG (2H)	Cable length in feet
Z25	= 25kV Elbow	2/0	= 2/0 AWG (3H)	
Z35	= 35kV Elbow			
Customized Cable End				
B	= 25 mm Universal Grounding Clamp 01-M-037			
H	= 20 mm Universal Grounding Clamp 01-M-034			
D	= Duck Bill Clamp HCDB-117			
C	= 01-M-044 C Clamp			
M	= Cable with ferrule			
E	= Exception			
Jacket Type				
Y	= Grounding Cable - yellow opaque jacket			

Jumpering Assemblies

Jumpering Assemblies

Features

- All suggested clamps are rated 400 Amps continuous rating
- This rating depends on the jumper cable rating
- Pre-assembled with a 5/8 - 11 UNC ferrule at each end
- Ends sealed with sealing tapes and clear heat shrink tubes
- Storage straps included

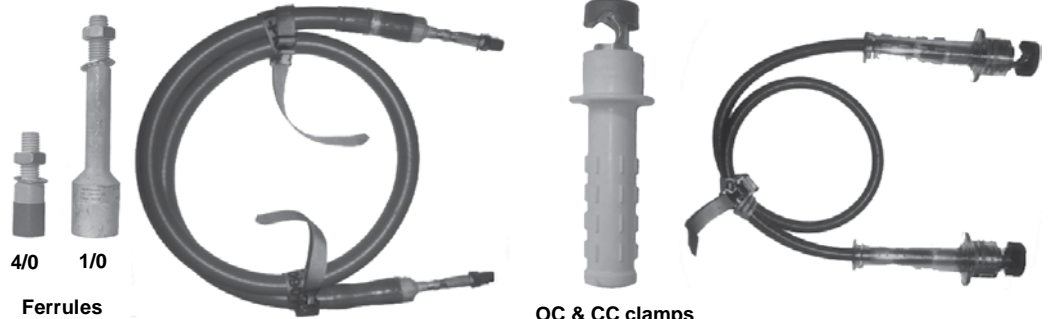

DP	D	15	1/0	6	
Cable End 1		Cable Length			
D	= Duck Bill Clamp HCDB-117	Cable length in feet			
DP	= Duck Bill Clamp with parking stud HCDB-117P				
OC	= Yellow opaque #6 SOL-954 MCM clamp				
CC	= Clear #6 SOL-954 ACSR clamp				
S	= Cable with ferrules				
Cable End 2					
D	= Duck Bill Clamp HCDB-117				
DP	= Duck Bill Clamp with parking stud HCDB-117P				
OC	= Yellow opaque #6 SOL-954 MCM clamp				
CC	= Clear #6 SOL-954 ACSR clamp				
S	= Cable with ferrules				
Cable Insulation and Size					
Cable Insulation (kV)	Size (AWG)	No of Strands	O.D. (In)	Current Rating	Jacket Color
2	4/0	551	0.841	400	Black
15	#2	259	0.780	200	Red
15	1/0	259	0.865	250	Red
15	2/0	259	0.910	300	Red
15	4/0	437	1.052	400	Red
25	1/0	413	1.113	260	Red
25	2/0	266	1.116	300	Red
35	1/0	427	1.270	250	Red



Optional Jumper cable carriage bag

