



MacLean Power
Systems
7801 Park Place Rd., York, SC 29745
USA (803) 628-2100

MPS Catalog Number

H7 40 10 010 MX SS 005

Revision: A

Date 1/27/2023

End Fittings

Tower End Fitting:

3/4"-10 Round Base (Galv. Duct. Iron)

Line End Fitting:

Drop Tongue (Aluminum)

Material

Number of Sheds:

5

Rod Diameter:

1-3/4"

Weight Estimate:

15.0 lbs

6.8 kg

Dimensional Values

Section Length (L):

17.9 in 454 mm

Rubber Length (X):

9.8 in 249 mm

Shed Height (P):

2.4 in 62 mm

Shed Diameter (B):

6.9 in 175 mm

Shed Spacing (S):

2.0 in 52 mm

Dry Arc Distance:

12.6 in 321 mm

Leakage Distance:

32.2 in 817 mm

Electricals Values

60 Hz dry Flashover:

163 kV

Min. Withstand

128 kV

60 Hz Wet Flashover:

117 kV

Min. Withstand

86 kV

Positive CIFO:

230 kV

Min. Withstand

200 kV

Negative CIFO:

275 kV

Min. Withstand

232 kV

Mechanical Values

Max. Design Cant. Load (MDCL):

1,350 lbs 6. kN


Specified Cant. Load (SCL):

2,800 lbs 12.5 kN

Specified Tensile Load (STL):


5,000 lbs 22.2 kN

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

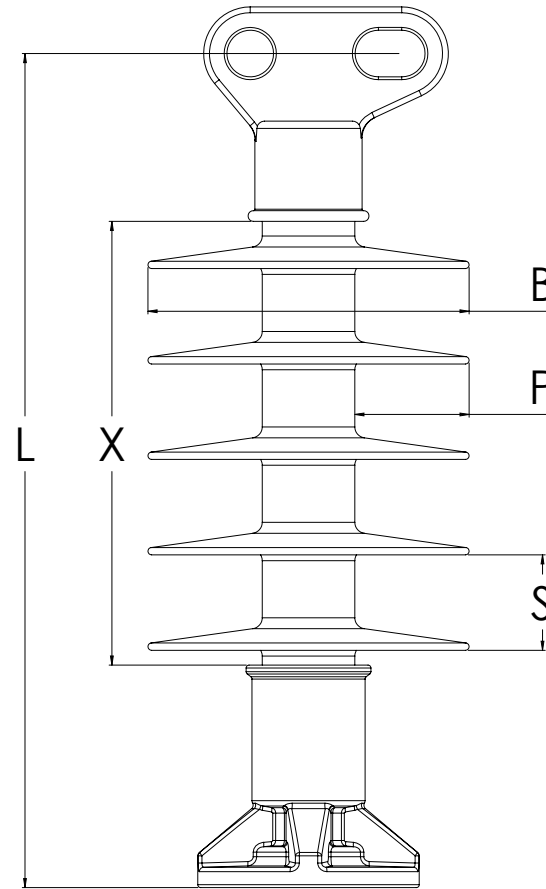

Ø 0.66 ± 1.17
3/4-10 UNC - 2B ± 1.00

Ø 4.75



Dimension: inches [millimeters]

Insulator assembly complies with ANSI C.29.18 and CSA C411.6 Standards

NOTE: Drawing not actual depiction of insulator appearance

Part Marking:

MPS WO#
H7 40 10 010 MX SS 005
46 kV
MDCL 1,350 lbs/6.0 kN