CATALOG NUMBER	DESCRIPTION	HOLES "A"	HOLES "B"
M-328-1	YOKE M-328-1 WITH SHIELD MOUNTING BRACKET HARDWARE	YES	NO
M-328-3	YOKE ONLY WITHOUT SHIELD MTG. HARDWARE	NO	NO
M-328-4	YOKE WITH SHIELD MTG. HARDWARE AND MODIFIED SECTION C-C	YES	NO
M-328-5	YOKE FOR MTG. BUTTERFLY TYPE SHIELD (FOR COMMONWEALTH EDISON SHIELD NO. ASM-528-9		
M-328-6	(SEE DWG. 494 FOR DETAILS)		
M-328-7	13/16 DIA HOLES TO BE 15/16 DIA. TO ASSEMBLE WITH ASM-352-4		
M-328-9	YOKE-DRILL & TAP HOLES A & B	YES	YES

NOTES

1. MAT'L - NODULAR IRON GRADE 604510.
2. SHRINK - 1/8" PER FOOT.
3. DRAFT - 3° UNLESS NOTED.
4. MARKING - BETHEA M-328-1. (AND OTHER MARKINGS AS SHOWN).
5. ULTIMATE STRENGTH - 60,000 LBS.
6. TOLERANCES SHOWN ARE FINISHED PART TOLERANCES.

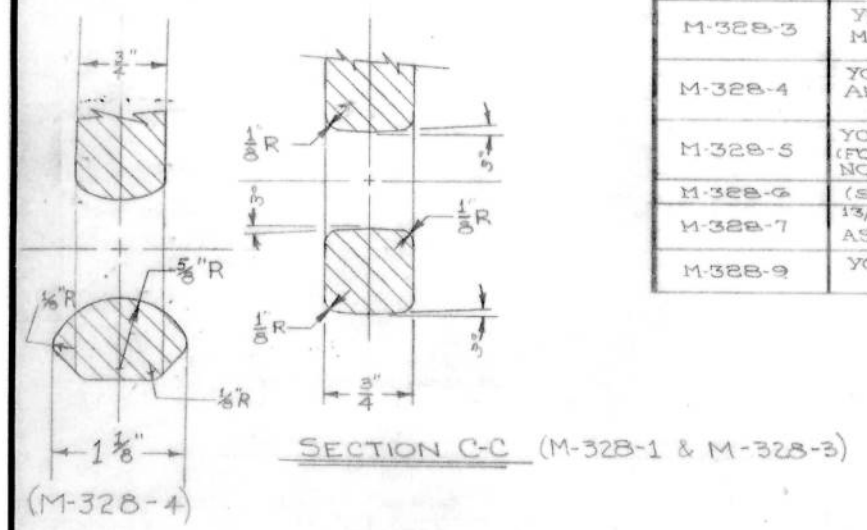

SECTION C-C (M-328-1 & M-328-3)

SECTION D-D

PATTERN DETAIL

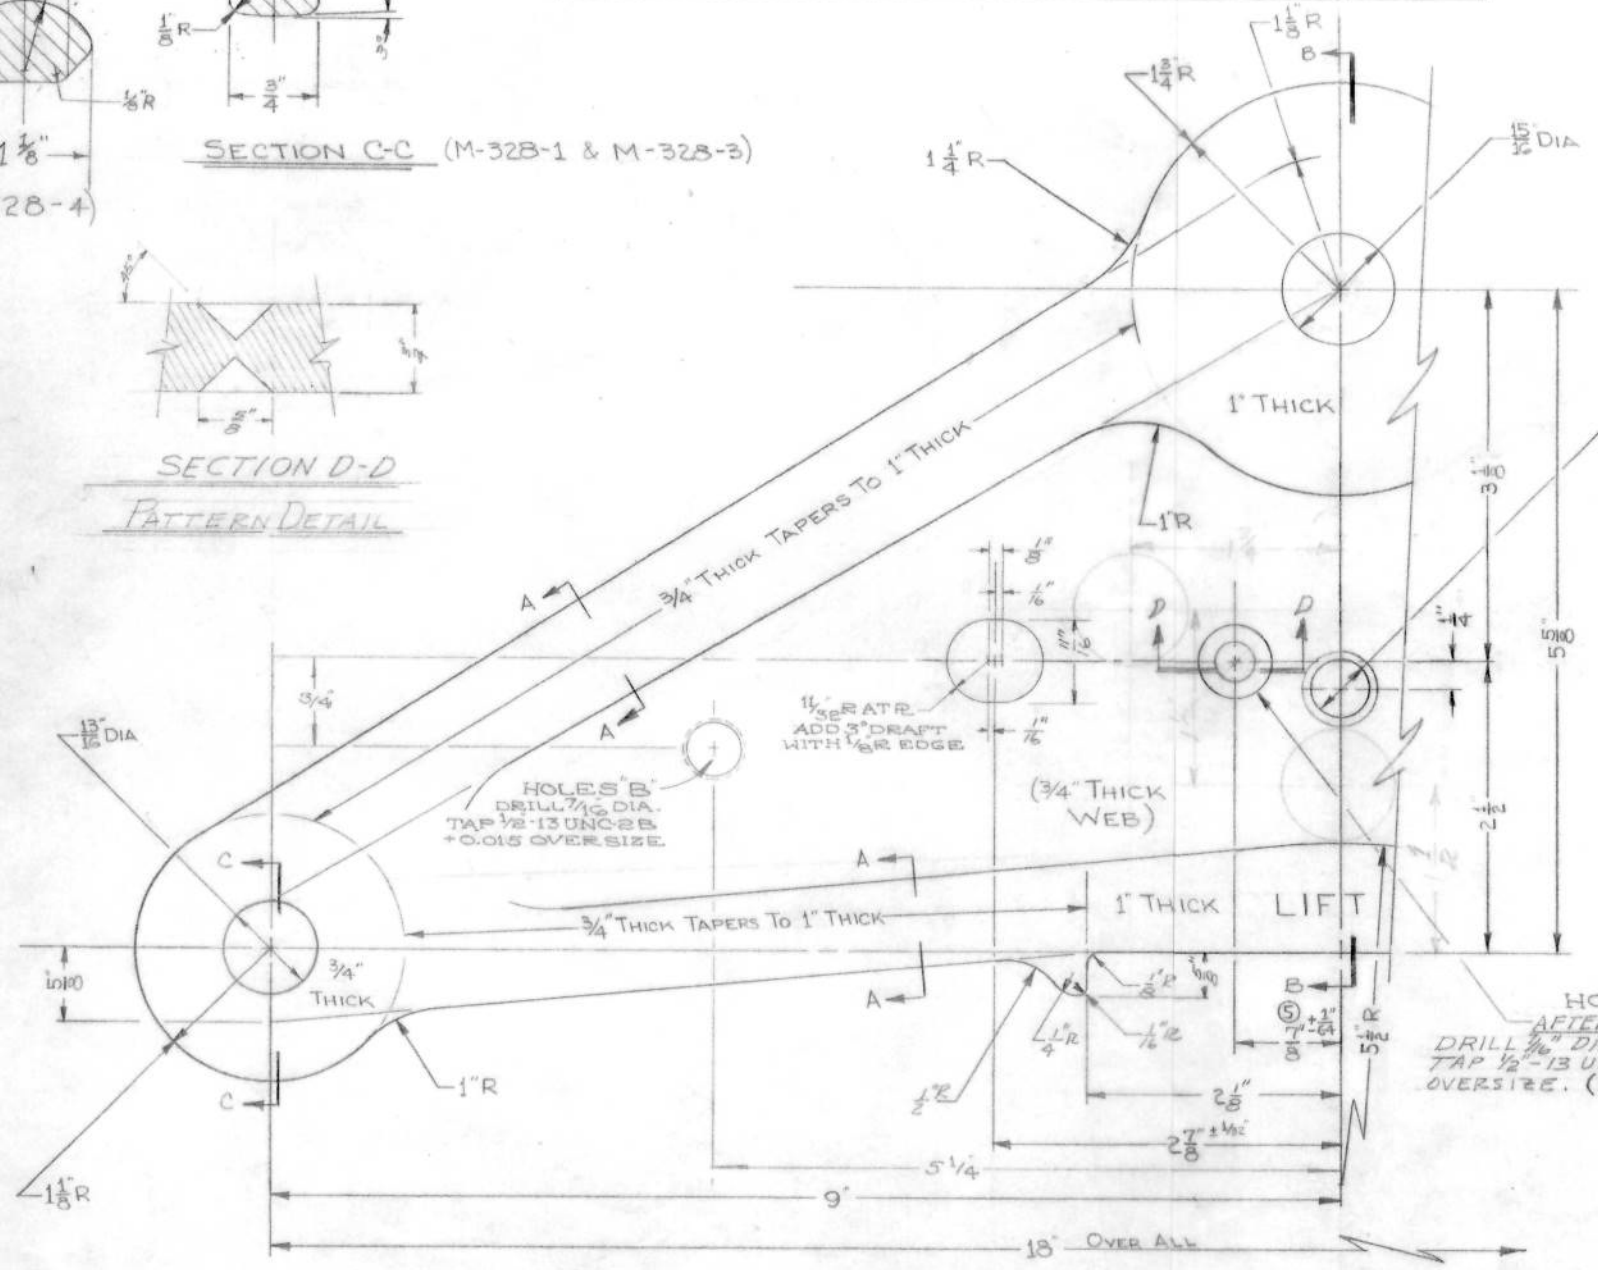

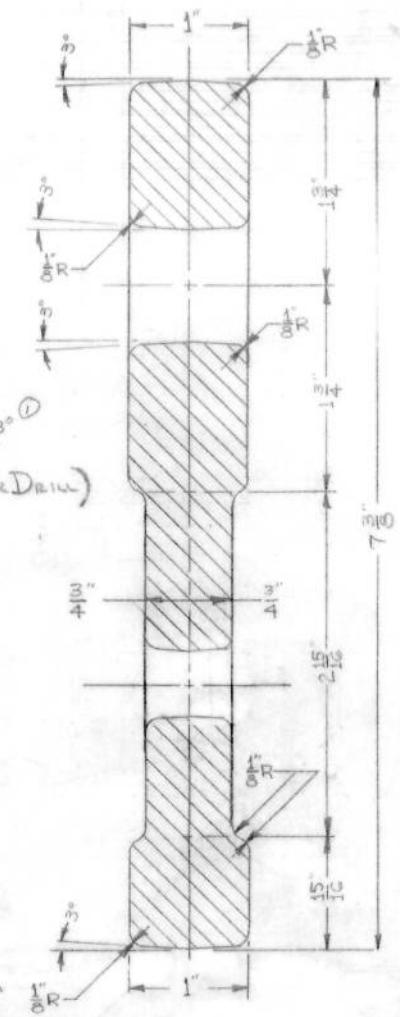

SECTION B-B

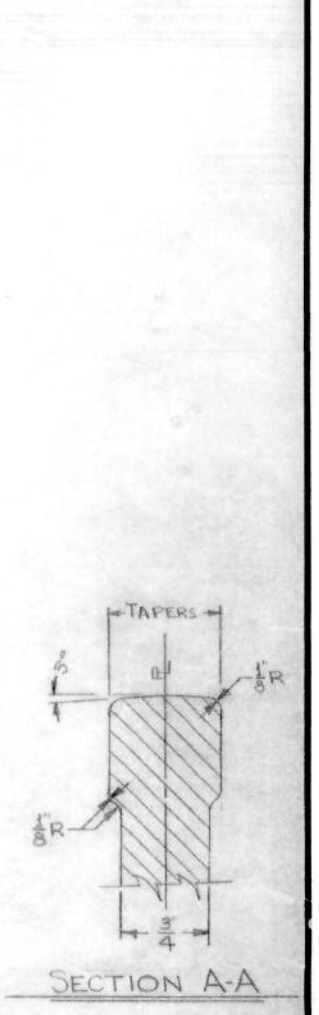

SECTION A-A

NOTE: SHEET 2 SHOWING M-328-2 SHIELD IS ON "D" SIZE SHEET

NO.	DATE	DESCRIPTION	BY
8	5-27-76	ADD IT. M328-10, & SHEET 4	BE
7	12-18-73	ADD IT. M328-9 TO TAB. HOLES "B"	BE
		ULT. STR. FROM 50,000 TO 60,000	DG
6	11-30-70	ADDED SHEET 3 AND M-328-8 & CHGD	
5	11-23-70	DIM. MK. ⑤ WAS 7/8" ± 1/32"	DG
4	10-18-67	SECTION D-D REDRAWN	EG
3	8-14-67	ADDED M-328-4 IN SECTION C-C	BM
2	5-5-67	ADDED TABULATION	RC
1	3-23-67	ADDED 1/2" DIA HOLE (MK-④)	RC

REVISIONS

BETHEA COMPANY INC.
BIRMINGHAM ALABAMA

DWN BY: RC	CKD BY: KS	APPROV BY: W.P. Conley

TRIANGULAR YOKE PLATE

ULTIMATE STRENGTH - 60,000 LBS

DATE: 3-23-67 DWG. NO. MC-328 SH 1