


## Disk Anchors

The Maclean Power corrosion-resistant disk anchor is designed for use low resistivity, alkaline, and acidic soils with electrolyte combinations.

This anchoring system consist of the standard hot dip galvanized plate anchor rod with an additional corrosion resistant Storm Greeter coating and a plate anchor coated in an asphalt based paint.



A fiber washer and cap nut are included in each rod assembly in order to protect the uncoated threads on the bottom of the rod.

Installation procedure is the same as the cross plate anchors and consists of auguring and angling a hole along with a slot. This allows the assembled anchor to be lowered into position and set at the guy angle.

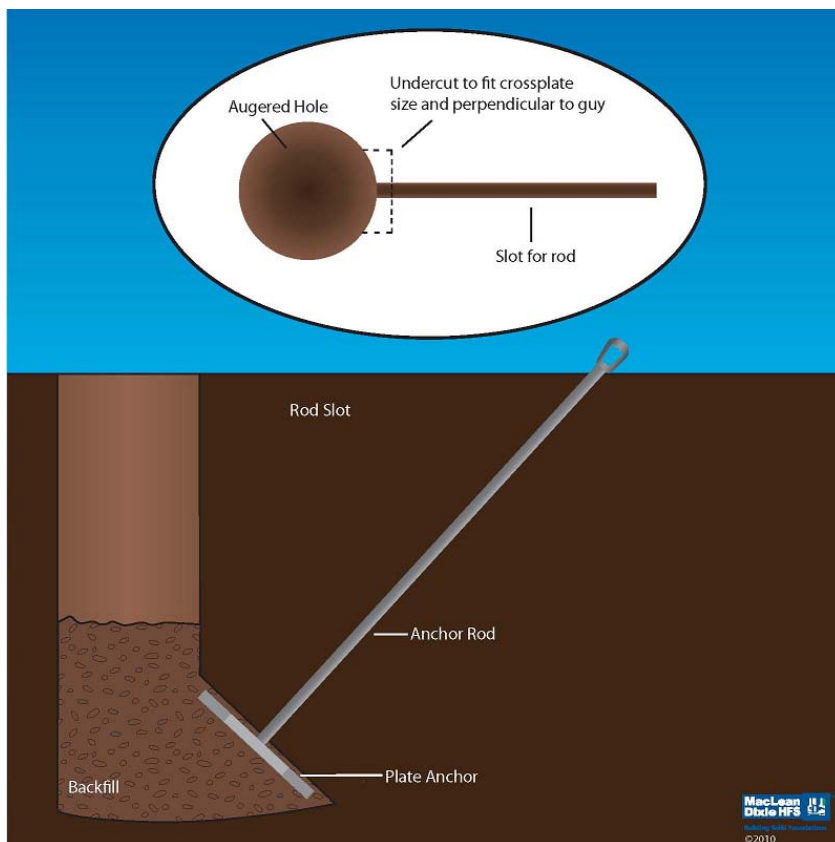

This is a typical installation. Care should be taken not to damage the rod's protective coating when tamping down the backfill.

## Disk Anchors

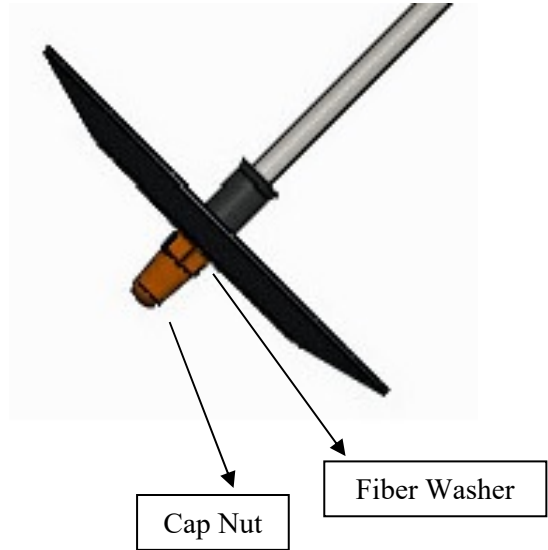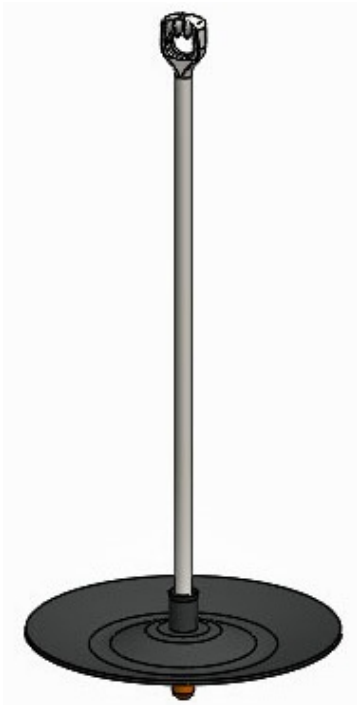

Disk Anchors			
Catalog Number	Diameter (in)	Thickness (in)	Compatible Rod Diameter (in)
DA1675	16	0.1875	3/4
DA161	16	0.1875	1
DA201187	20	0.1875	1
DA201250	20	0.25	1
DA241187	24	0.1875	1
DA241250	24	0.25	1

Corrosion Protected Rods			
Catalog Number	Number of Guy Attachments	Diameter (in)	Length (ft)
J7527CPR	2	3/4	7
J7528CPR		3/4	8
J7539CPR		1	9
J7540CPR		1	10