
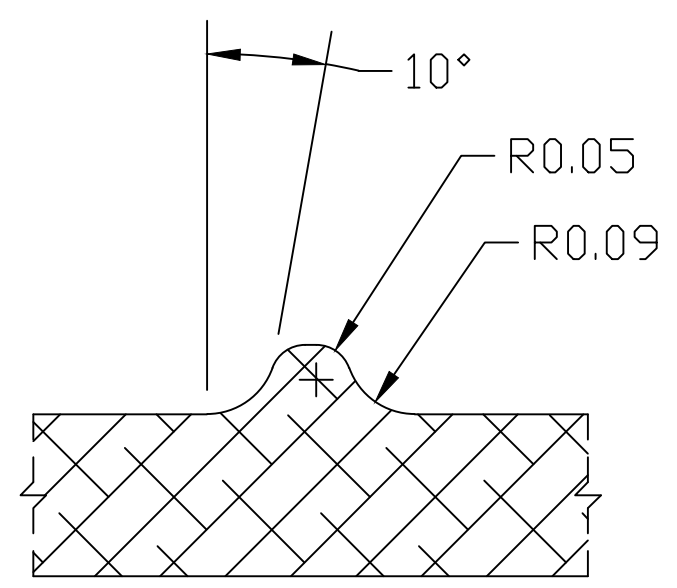


NOTES:

- 1.0 MATERIAL—DUCTILE IRON PER ASTM A-536, GRADE 654512, BHN 156-217. MATERIAL CERTIFICATION REQUIRED.
- 2.0 COATING—HOT DIP GALVANIZE PER ASTM A-153.
- 3.0 SHRINK—0.125"/FT. (MASTER PATTERN).
- 4.0 DRAFT—3° UNLESS NOTED.
- 5.0 RADII—0.063" UNLESS NOTED.
- 6.0 ISO 8062 CT9 TOLERANCES UNLESS NOTED
- 7.0 CASTING MUST BE FREE FROM BURS, SEAMS, WELDS, FILLER, HOLES, FLASHES AND SHARP EDGES.
- 8.0 MARKING—RAISED 1/4" LETTER AS MARKED.
- 9.0 PART NO.—>CW-33-6-BC, (P64504C)
10. EST. WEIGHT - .550 LBS. Ⓜ
11. DIMENSION IN INCHES.

MFG LOGO, CAVITY #  
& DATE CODE (BOTH SIDES, IF NEEDED) Ⓜ  
RECESSED ON BACK, 3/16" SIZE

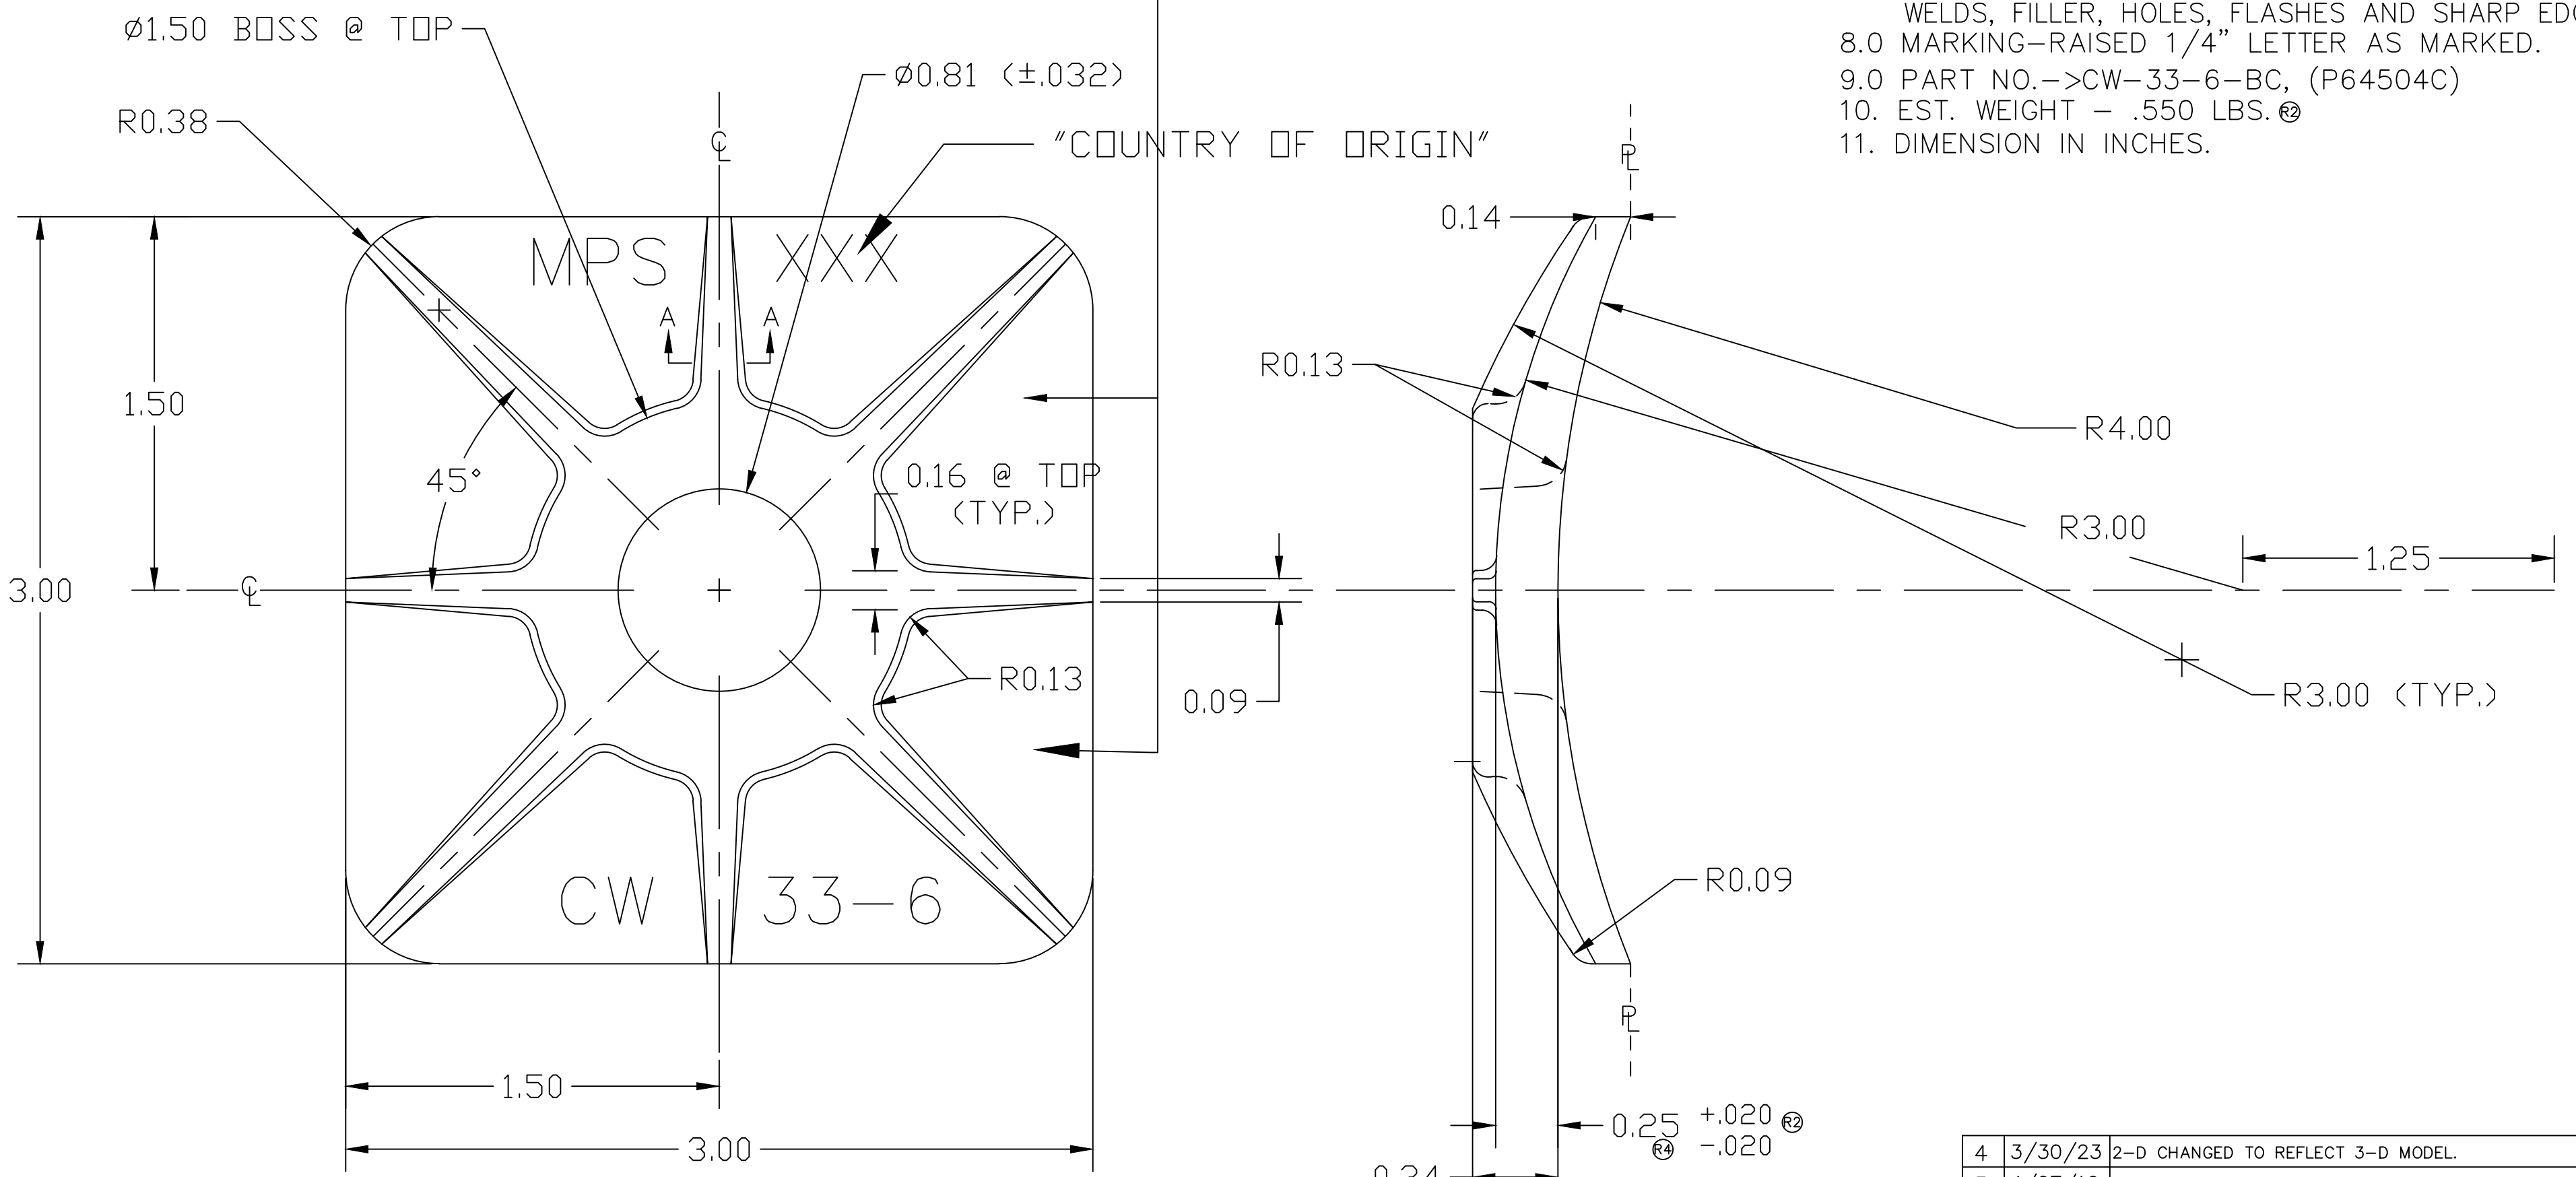

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

NO.	DATE	DESCRIPTION	BY
4	3/30/23	2-D CHANGED TO REFLECT 3-D MODEL.	KMK
3	4/07/16	THICKNESS TOL. WAS +0, -0.2, WEIGHT WAS .37 LBS.	WCL
2	5/15/13	THICKNESS TOL. WAS +0, -0.2, WEIGHT WAS .37 LBS.	KK
1	11/30/12	MADE FROM PA-2074 Rev. 3	KK

**MacLean Power Systems**  
BIRMINGHAM, ALABAMA

DRAWN BY: EHJ      SCALE: NONE

CURVED POLE WASHER  
CATALOG NUMBER: CW-33-6

DATE: 12-19-84      DRAWING NO: PA-2074C      SH: 1 OF 1      R / 4