


NOTE: THIS SLOT IN GPA-43-6T PLUGGED WITH REMOVABLE INSERT TO CONVERT TO GPA-43-6

- NOTE:
1. MATERIAL: DUCTILE IRON GRADE 654512; HOT DIP GALV. PER ASTM A-153
  2. RADII:  $1/16$ " UNLESS NOTED
  3. DRAFT: 3° UNLESS NOTED
  4. SHRINK SCALE:  $1/8$ " PER FOOT
  5. MARKING: RAISED

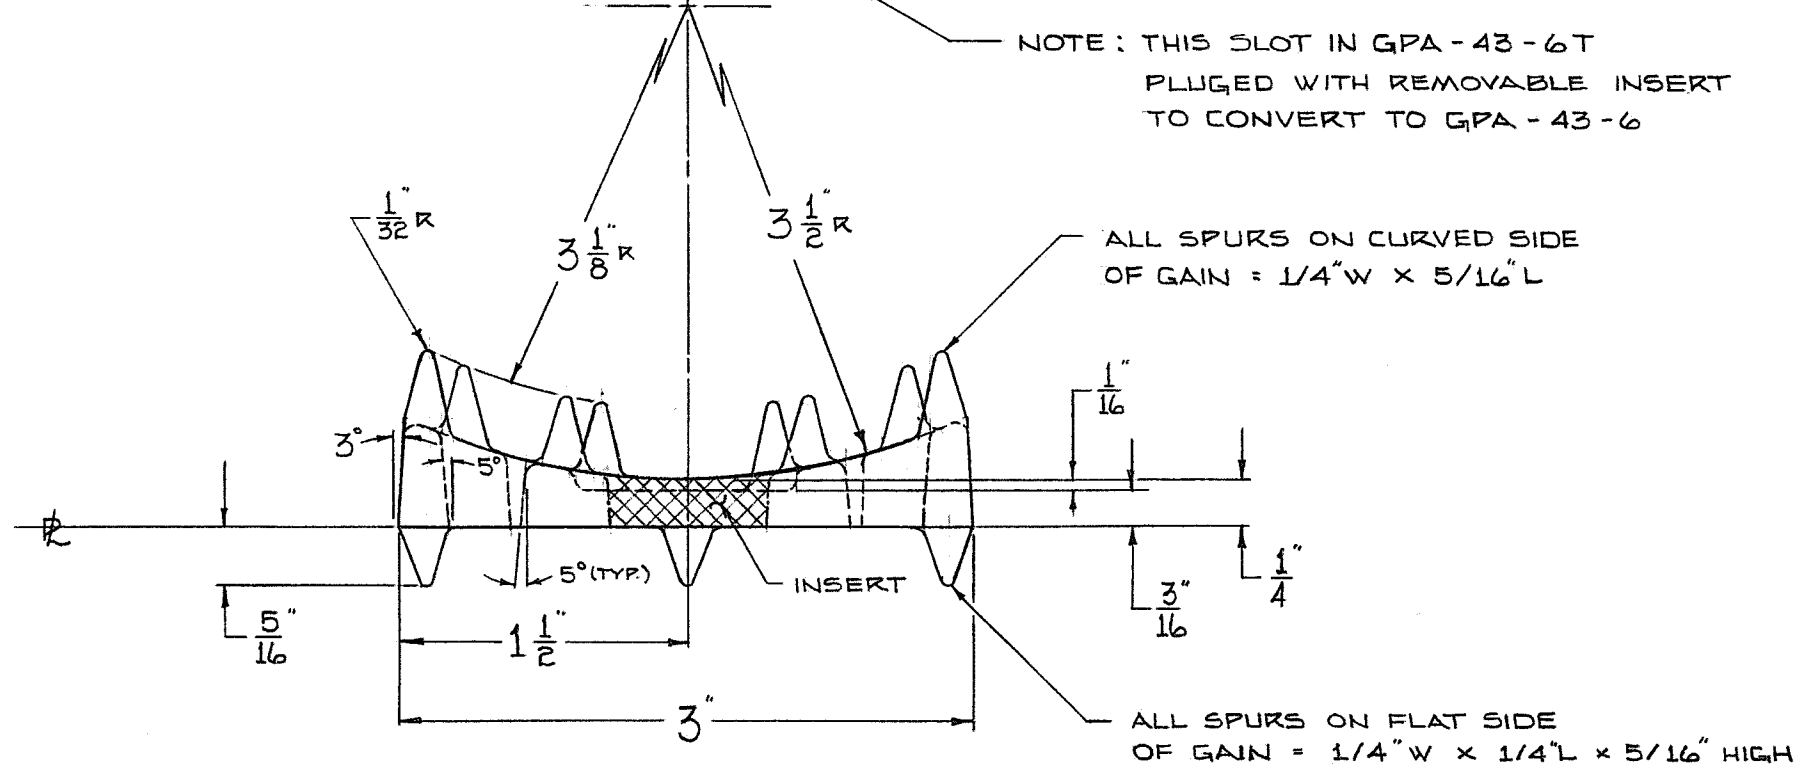

|   |                     |        |       |
|---|---------------------|--------|-------|
| CONTINENTAL ELECTRIC COMPANY<br>BIRMINGHAM, AL. |                     |        |       |
| SCALE:<br>1" = 1"                               | DWN.<br>EHJ         | CHK'D: | APRD. |
| CROSSARM GAIN<br>GPA-43-6 or GPA-43-6T          |                     |        |       |
| DATE:<br>12-12-84                               | DWG. NO.<br>PB-1166 |        |       |