

NOTES: 1.0 MATERIAL-DUCTILE IRON PER ASTM A-536, GRADE 654512, BHN 156-217. MATERIAL CERTIFICATION REQUIRED.

2.0 COATING-HOT DIP GALVANIZE PER ASTM A-153.

3.0 SHRINK-0.125"/FT. (MASTER PATTERN).

4.0 DRAFT-3° UNLESS NOTED.

5.0 RADII-0.063" UNLESS NOTED.

6.0 TOLERANCE - ISO 8062 CT9, UNLESS NOTED

7.0 CASTING MUST BE FREE FROM BURS, SEAMS, FLASHES, HOLES, WELDS AND SHARP EDGES.

8.0 MARKING-RAISED 1/4" LETTERS AS MARKED.


9.0 PART NO.->CW33-5BC, (P64503C)

->CW33-6BC, (P64504C)

SUFFIX "U" CALLS FOR NO GALVANIZE

10. EST. WEIGHT - 0.58 LBS.

11. DIMENSION IN INCHES.

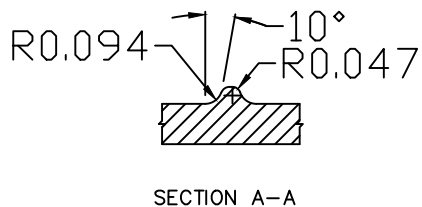


SECTION A-A

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

NO.	DATE	DESCRIPTION	BY
2	12/05/18	ADDED SUFFIX "U" OPTION FOR NO GALV	MBG
1	10/29/07	ADDED 3" R, .343 WAS .31, .25 WAS .219	MW

 <b>Maclean Power Systems</b> BIRMINGHAM, ALABAMA		
DRAWN BY: EHJ	APPROVED BY: CHECKED BY:	SCALE: NONE
CURVED POLE WASHER CATALOG NUMBER: CW-33-5 & CW-33-6		
DATE: 12-19-84	DRAWING NO: PB-1168C	SH: 1 OF 1 R / 2