

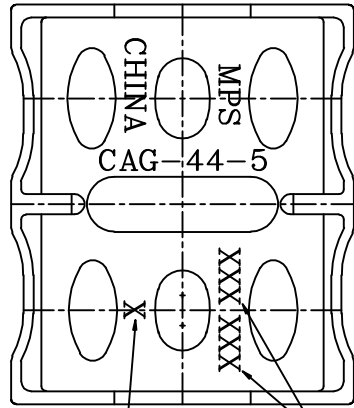
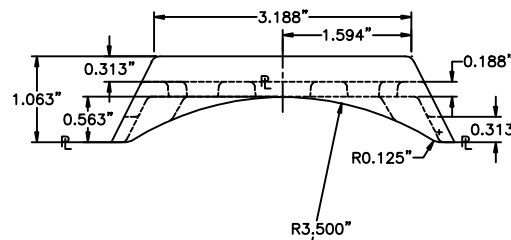


REVISIONS				
NO.	DATE	DESCRIPTION	BY	CHK

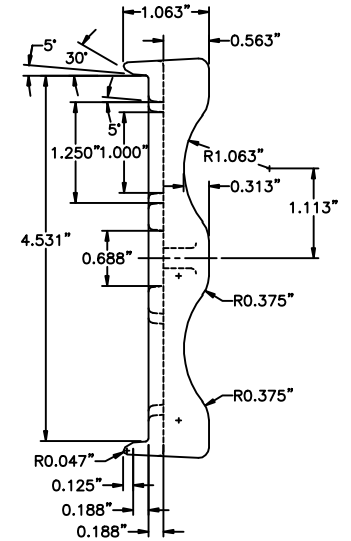

CAVITY NUMBER

MFG. I.D. & DATE CODE

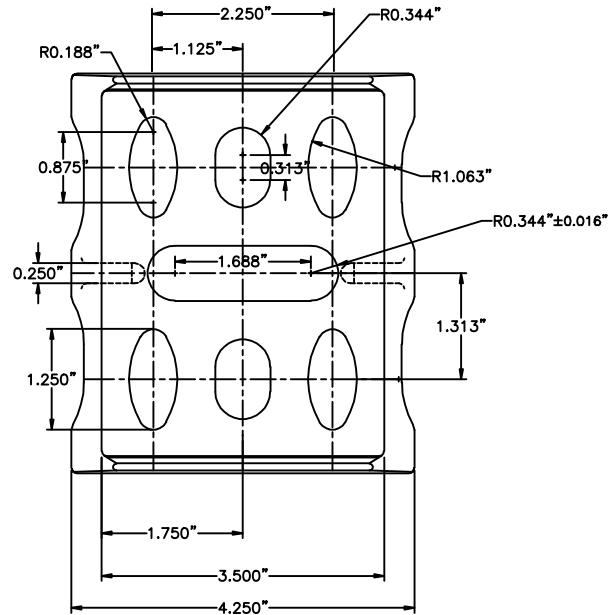

NOTES:

- 1.0 MATERIAL—DUCTILE IRON PER ASTM A-536, GRADE 654512, BHN 156-217. MATERIAL CERTIFICATION REQUIRED.
- 2.0 COATING—HOT DIP GALVANIZE PER ASTM A-153.
- 3.0 SHRINK—0.125"/FT. (MASTER PATTERN).
- 4.0 DRAFT—3° UNLESS NOTED.
- 5.0 RADII—0.063" UNLESS NOTED.
- 6.0 STANDARD CASTING TOLERANCE UNLESS NOTED.
- 7.0 CASTING MUST BE FREE FROM BURS, SEAMS, FLASHES AND SHARP EDGES.
- 8.0 MARKING—RAISED 5/16" LETTERS AS MARKED.
- 9.0 PART NO.—>CAG-44-5-BC, (P64453C)
10. EST. WEIGHT — 1.100 LBS.
11. DIMENSION IN INCHES.

Maclean Power Systems
BIRMINGHAM, ALABAMA

CROSS ARM GAIN
CAG-44-5

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

DATE: 7/1/85
DRAWN BY: []
CHECKED BY: []
SCALE: []
REV: []
NO. []
PAGE: []
OF: []

PB-234C

ENG. REF.