

MPS Catalog Number:

**S6 40 80 066 VX SS 039**

Date:

05/11/2021

**End Fittings**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (IEC 20)

**Material**

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

39 Standard

Rod Diameter:

18 mm

Weight Estimate:

18 lbs      8 kg

**Dimensional Values**

Section Length (L):

79.4 in      2,017 mm

Rubber Length (X):

66 in      1,676 mm

Standard Shed Height (P):

2.2 in      55 mm

Shed Spacing (S):

1.69 in      43 mm

Dry Arc Distance:

69.5 in      1,765 mm

Leakage Distance:

216.1 in      5,489 mm

**Electricals Values**

60 Hz dry Flashover (Min. Withstand):

676 kV      616 kV

60 Hz Wet Flashover (Min. Withstand):

588 kV      512 kV

CIFO Positive (Min. Withstand):

1136 kV      1004 kV

CIFO Negative (Min. Withstand):

1192 kV      1059 kV


**Mechanical Values**

Specified Mech. Load (SML):

36,000 lbs      160.1 kN

Routine Test Load (RTL):

18,000 lbs      80.1 kN

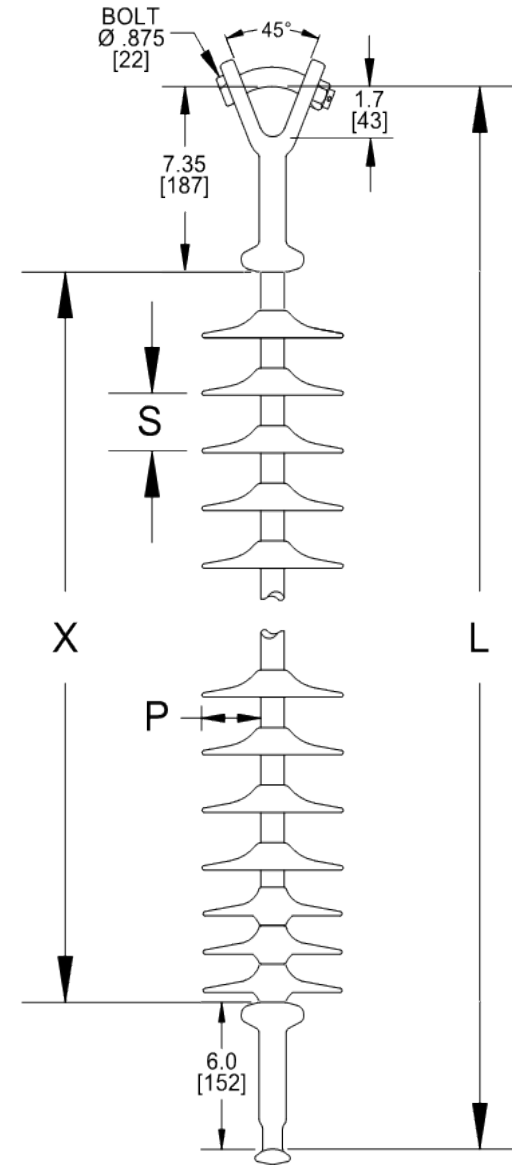

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Notes:

Prepared By: Laurel Wallace