



Grounding Assemblies



Grounding Assemblies

Features

- All grounding components can be sold separately
- For other components, see following pages

Sealing Tape		
Catalog Number	Required Per End	Length (In)
HC-10068-C	1	6
HC-10068		25 ft roll

Clear Polymer Heat Shrink Tube


Catalog Number	Required Per End	Length (In)	I.D. (In)	For Cable Size
HC-10067-1.1	1	5.0	1.1	#2 - 2/0
HC-10067-1.1-7	1	7.0	1.1	#2 - 2/0
HC-10067-1.5	1	6.0	1.5	4/0
HC-10067-1.5L	1	9.6	1.5	4/0
HC-10067-2.0	1	9.6	1.5	350 - 500 MCM

Cable Termination Kits (per each extremity)

Each kit includes (1) ferrule, heat shrink tube, and sealing tape

Catalog Number	For Cable Size
KIT 01-M-038-35-2	#2
KIT 01-M-038-50-1/0	1/0
KIT 01-M-038-2/0	2/0
KIT 01-M-038-4/0	4/0
KIT 01-M-038-350	350 MCM
KIT 01-M-038-500	500 MCM

Caliber #2, 1/0, 2/0 and 4/0

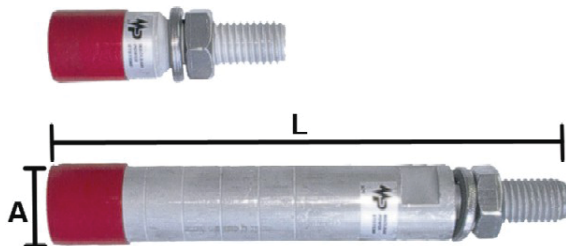

Caliber 350 and 500

Ferrules

Features

- All ferrules are filled with inhibitive grease to prevent humidity infiltration
- Compression ferrules for 5/8 - 11 UNC threaded type terminal
- Stainless steel hardware (nut and lock washer) and grease cap included

Material

99.9% electrolytic tin-plated copper

Catalog Number	Cable Caliber	Compression Die		Dimensions		Capacity 15 Cycles	Capacity 30 Cycles	Weight
		Husky	Burndy	A	L			
01-M-038-35-2	2 AWG	HT41CE	U-164*	0.625	3	12kA (IEC) 14.5kA (ASTM)	10kA (ASTM)	0.26
01-M-038-35-50-1/0	1/0 AWG	HT41CF	U-166	0.690	3	20kA (IEC) 21kA (ASTM)	15kA (ASTM)	0.23
01-M-038-2/0	2/0 AWG	HT41CF	U-166	0.750	3	22kA (IEC) 27kA (ASTM)	20kA (ASTM)	0.29
01-M-038-4/0	4/0 AWG	HT41CJ	U-168	0.940	3	35kA (IEC) 43kA (ASTM)	30kA (ASTM)	0.37
01-M-038-350	350 MCM	HT41BL	U34-RT	1.062	7	40kA (IEC) 75kA (ASTM)	53kA (ASTM)	1.05
01-M-038-500	500 MCM	HT41BP	U39-RT	1.300	7	55kA (IEC) 86.3kA (ASTM)	61kA (ASTM)	1.40

Notes:

* - For 2 AWG transparent silicone jacket cable and 2 AWG yellow jacket cable, use Die U-165