


REVISIONS				
NO.	DATE	DESCRIPTION	BY	CHKD
1	01/15/15	LW WAS FOR LW & SCE ONLY.	WCL	WCL
2	05/17/21	REPLACED WITH NEW CASTINGS	EDB	
3	11/08/21	COMBINED WITH "2" DRAWING	EDB	

HEX PIN REPLACES CLEVIS
PIN IN ASO-398-1-N-HP

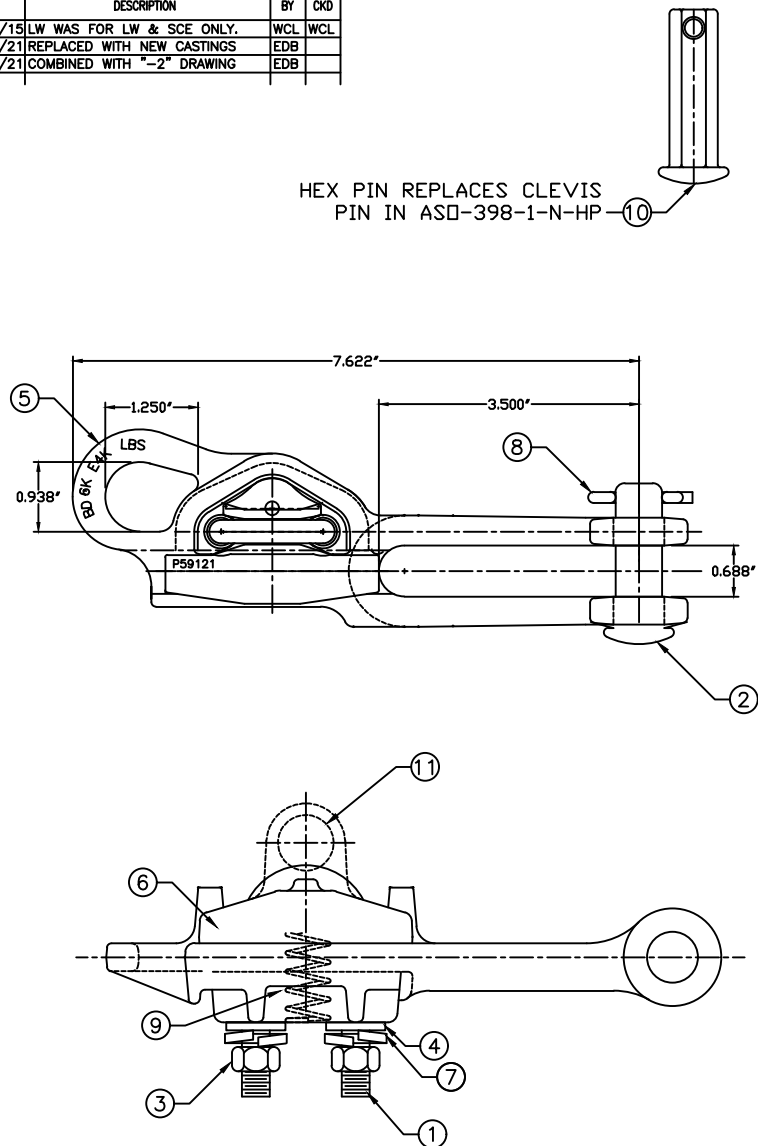

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY			
				A	B	C	D
1	P55991	H-0200-04	3/8" U BOLT	1	1	1	1
2	P56093	H-0315-02	5/8" X 1-7/8" CLVS PIN	1	1	-	1
3	P56136	H-0400-03-W	3/8"-16 HEX NUT FIN	2	2	2	2
4	P56292	H-0500-03	3/8" FLAT WASHER	2	2	2	2
5	P59120N	*ASO-398-1B	NEW ASO-398-1B	1	1	1	1
6	P59121N	*ASO-398-1K	NEW ASO-398-1K	1	1	1	-
7	P60804	H-0520-03	3/8" LOCKWASHER	2	2	2	2
8	P61134	M-111-3	LONG COTTER PN	1	1	1	1
9	P61136	H-0476-02	0.312I.D.X1.88 SPRING	1	1	1	1
10	P61654	H-0320-03	HEX CLEVIS PIN	-	-	1	-
11	P59121E	ASO-398-1EK	ASO-398 EYE KPR	-	-	-	1

ASSEMBLY NUMBER	REF. NO.
ASO-398-1-N	A
ASO-398-1-N-LW	B
ASO-398-1-N-HP	C
ASO-398-1E-N	D

NOTES:

1. MATERIAL - BODY AND KEEPER:
A356-T6 ALUMINUM ALLOY

HARDWARE:
STEEL, HOT DIP GALVANIZED PER
ASTM-A153

COTTER PIN AND COMP. SPRING:
STAINLESS STEEL

2. ULTIMATE STRENGTH - BODY: 6,000 LBS.
EYE: 4,000 LBS.

3. CLAMPING RANGE - 0.19" TO 0.46"

ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

HOT LINE DEAD END CLAMP
ASO-398-1-N, ASO-398-N-LW
ASO-398-1-N-HP, ASO-398-1E-N

DATE: 12/5/11	SCALE: NONE	NO.	BC8514-1	R / 3	SH 1 OF 1
OWN. BY: CDR	CHKD. BY:	APR. BY:			