


This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

NO. BC-8673-1

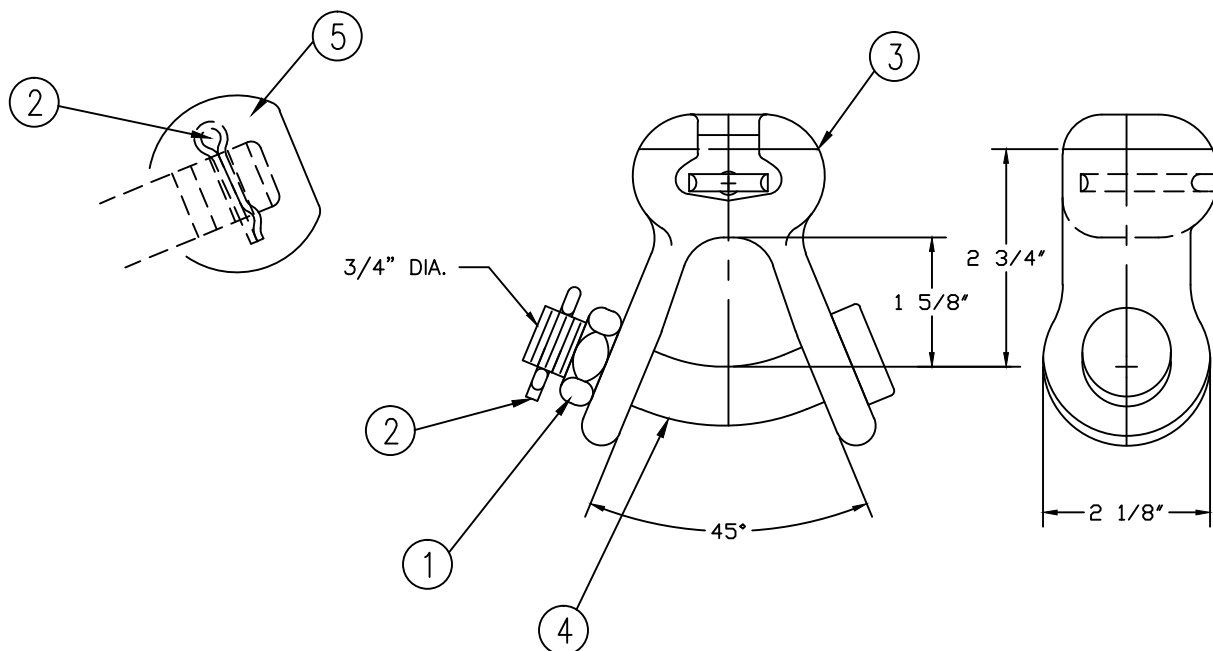

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY	
				A	B
1	P56158	H-0402-06	NUT HX JAM 3/4"	1	-
2	P56110	H-0360-02	COTTER PN HMP 3/4"	1	1
3	P56741	M-0147-30R	SYCR - 56 GALV	1	1
4	P55833	H-0100-01	3/4" BENT BOLT	1	1
5	P58933	P-0350-01	3/4" SPHERE NUT	-	1

NOTES:

1. MATERIAL:

- A. BODY - DUCTILE IRON, HOT DIP GALVANIZED PER ASTM A153
- B. COTTER PIN - AISI 302 STAINLESS STEEL
- C. HARDWARE - STEEL, HOT DIP GALVANIZED

2. ULTIMATE STRENGTH: 30,000 LBS.

3. WEIGHT: 2.670 LBS.

4. ANSI CLASS 52-3 & 52-5 SOCKET.

NO.	DATE	DESCRIPTION	BY	CKD



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

SYCR SOCKET Y-CLEVISES
CATALOG NO: SYCR-56

REVISIONS

DATE: 3/21/12	SCALE:	NO. BC-8673-1	R / 0	SH.1 OF 1
BY: KH	BY: WCL	BY: WCL		