

MPS Catalog Number:

S6 40 80 072 VA SS 030

Date:

05/11/2021

End Fittings

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (IEC 20)

Material

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

30 Standard

Rod Diameter:

18 mm

Weight Estimate:

18 lbs

8 kg

Dimensional Values

Section Length (L):

85.4 in 2,169 mm

Rubber Length (X):

72 in 1,829 mm

Standard Shed Height (P):

2.2 in 55 mm

Shed Spacing (S):

2.5 in 64 mm

Dry Arc Distance:

72.1 in 1,831 mm

Leakage Distance:

187.1 in 4,752 mm

Electrical Values

60 Hz dry Flashover (Min. Withstand):

701 kV 637 kV

60 Hz Wet Flashover (Min. Withstand):

608 kV 529 kV

CIFO Positive (Min. Withstand):

1175 kV 1040 kV

CIFO Negative (Min. Withstand):

1232 kV 1097 kV


Mechanical Values

Specified Mech. Load (SML):

36,000 lbs 160.1 kN

Routine Test Load (RTL):

18,000 lbs 80.1 kN

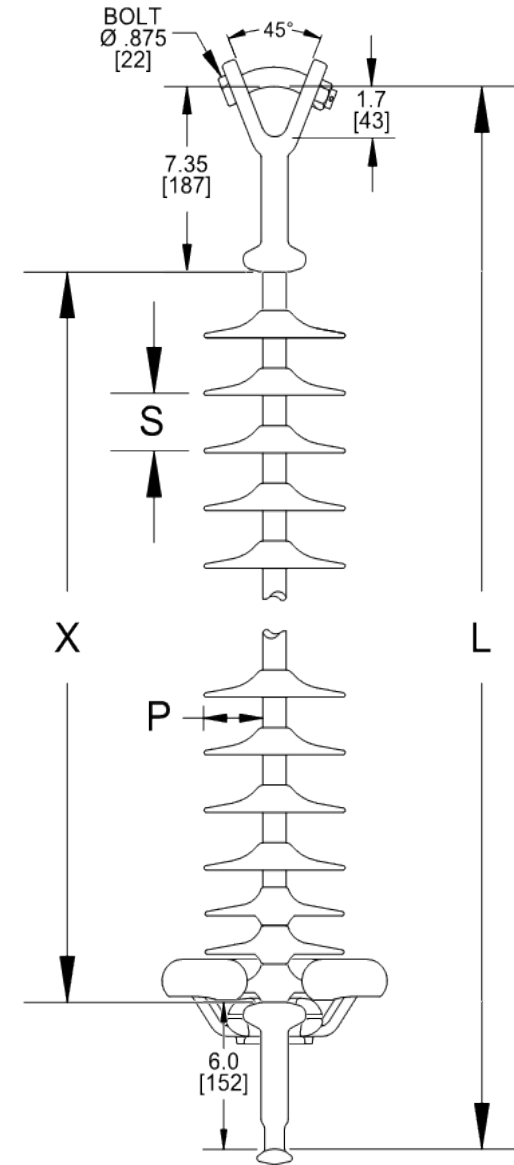

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 7801 Park Place Rd., York, South Carolina 29745, USA."

Dimension: inches [millimeters]

NOTE: Drawing not actual depiction of insulator appearance.

Silicone rubber sheath and sheds complies with applicable ANSI and IEC standards.

Notes:

Prepared By: Laurel Wallace